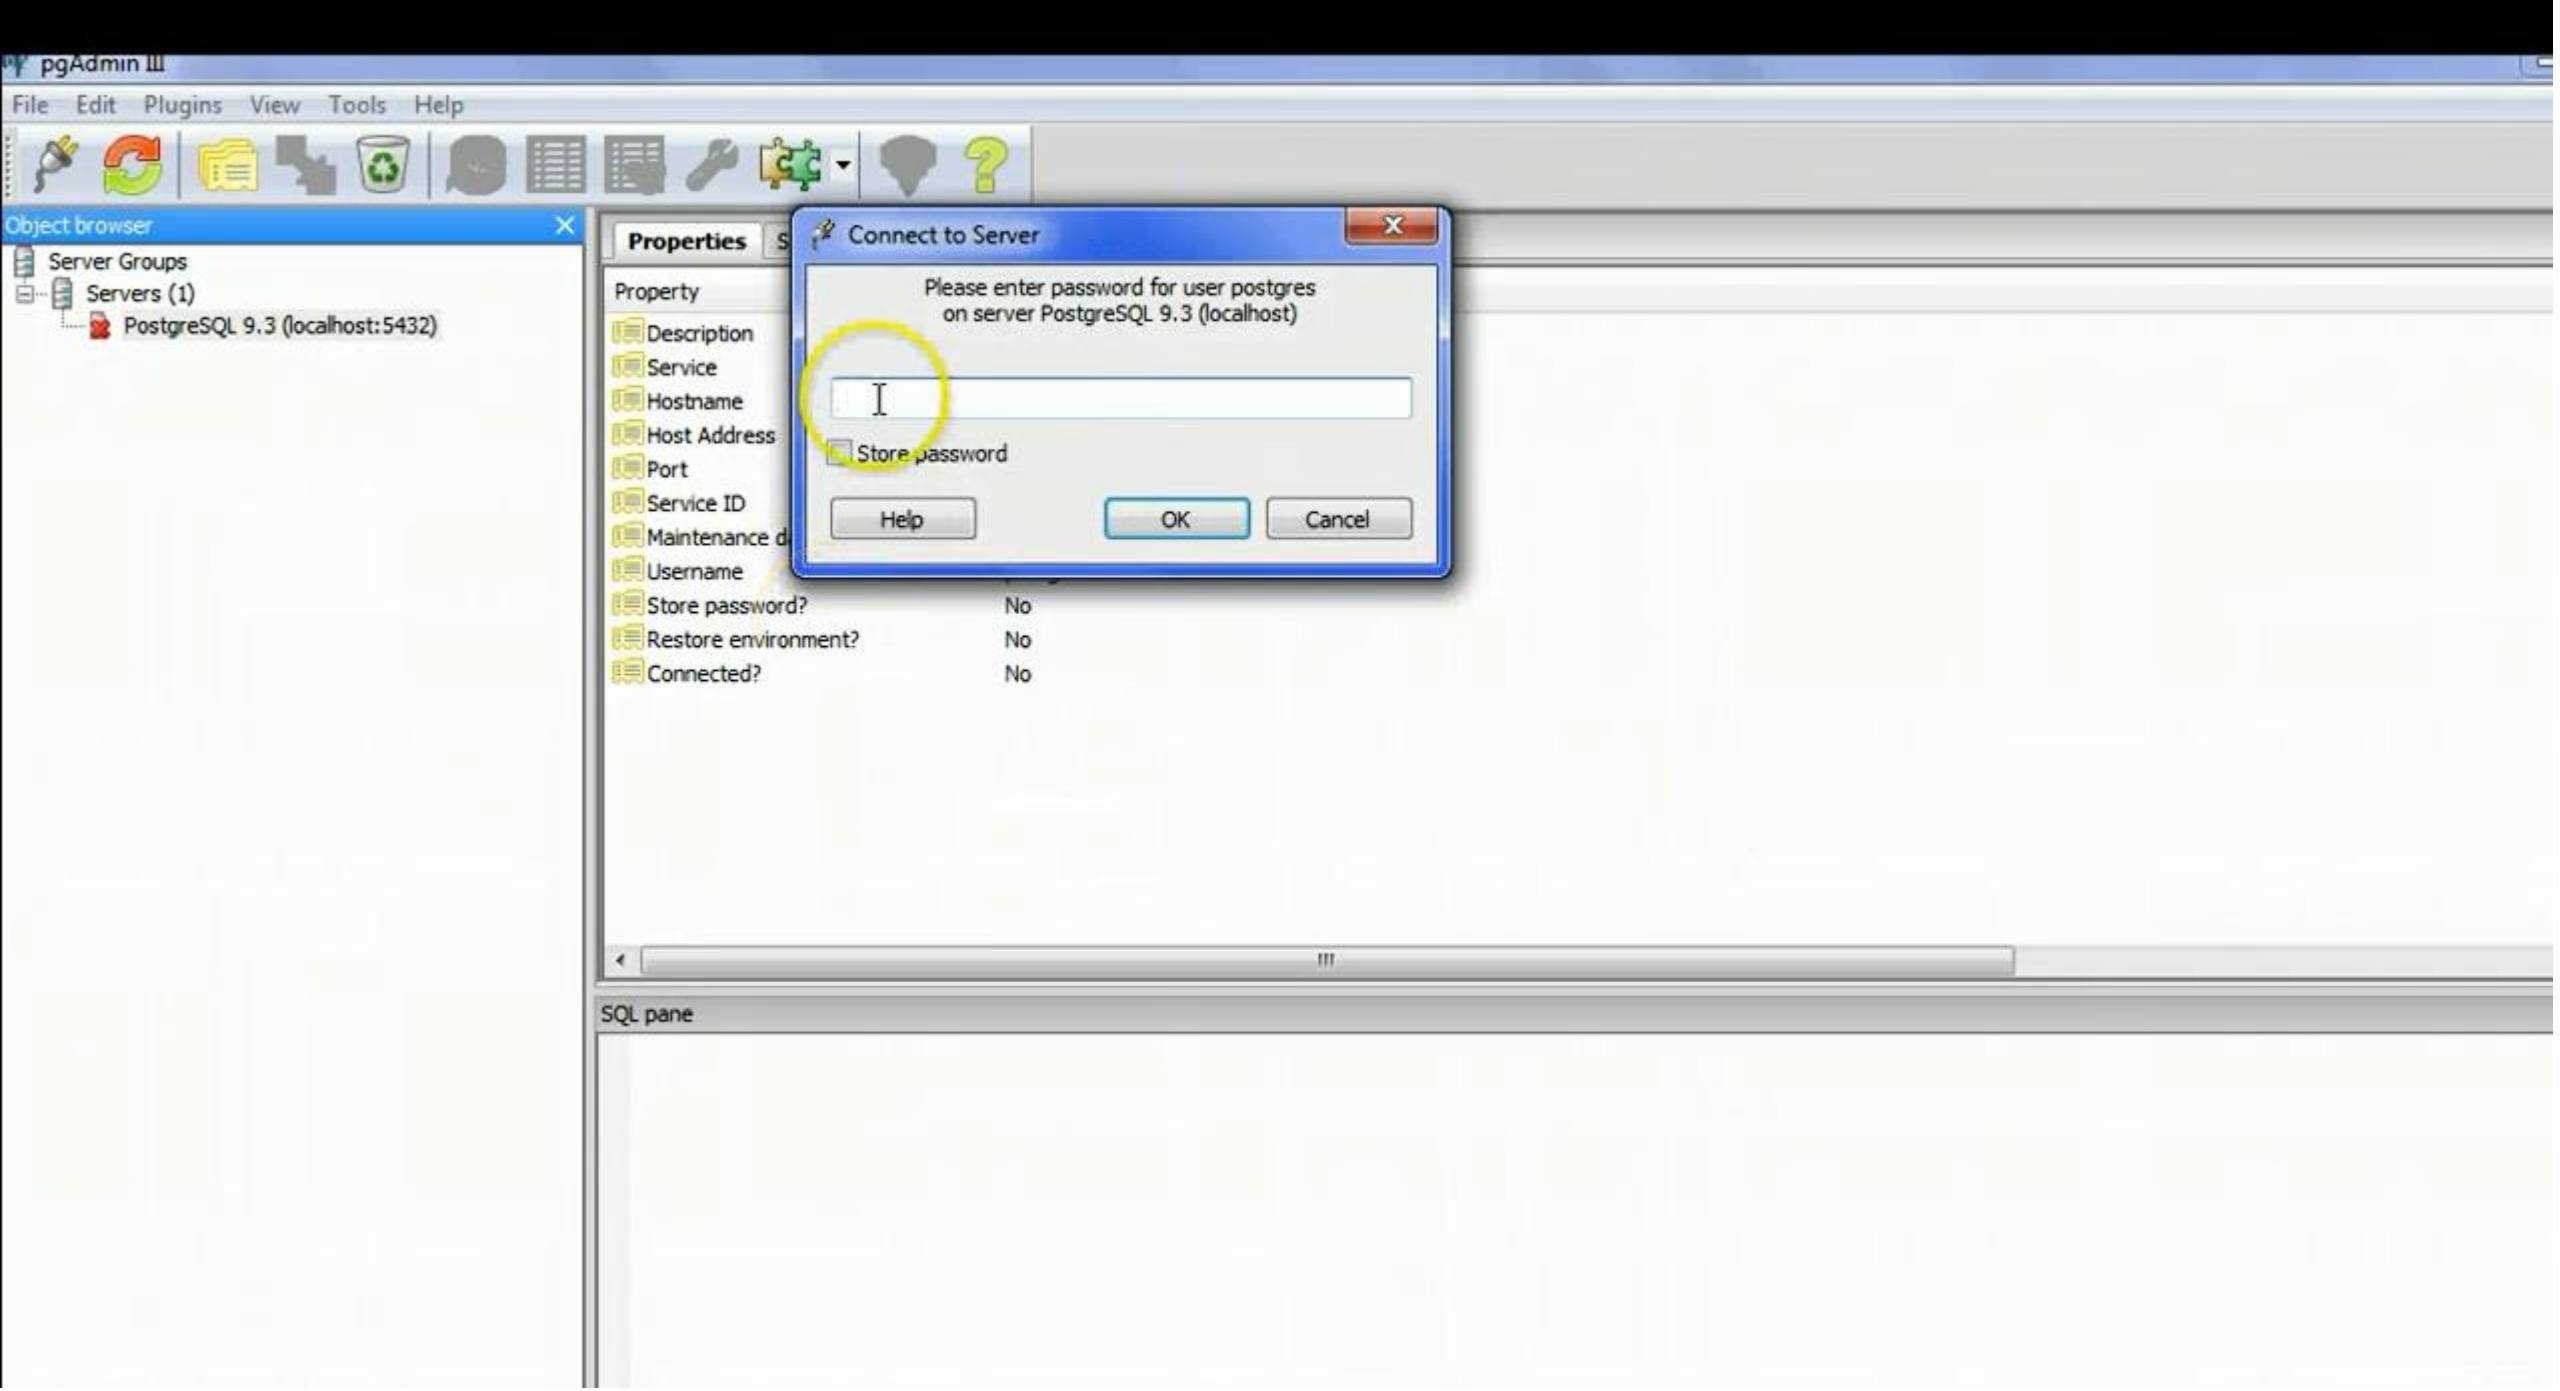
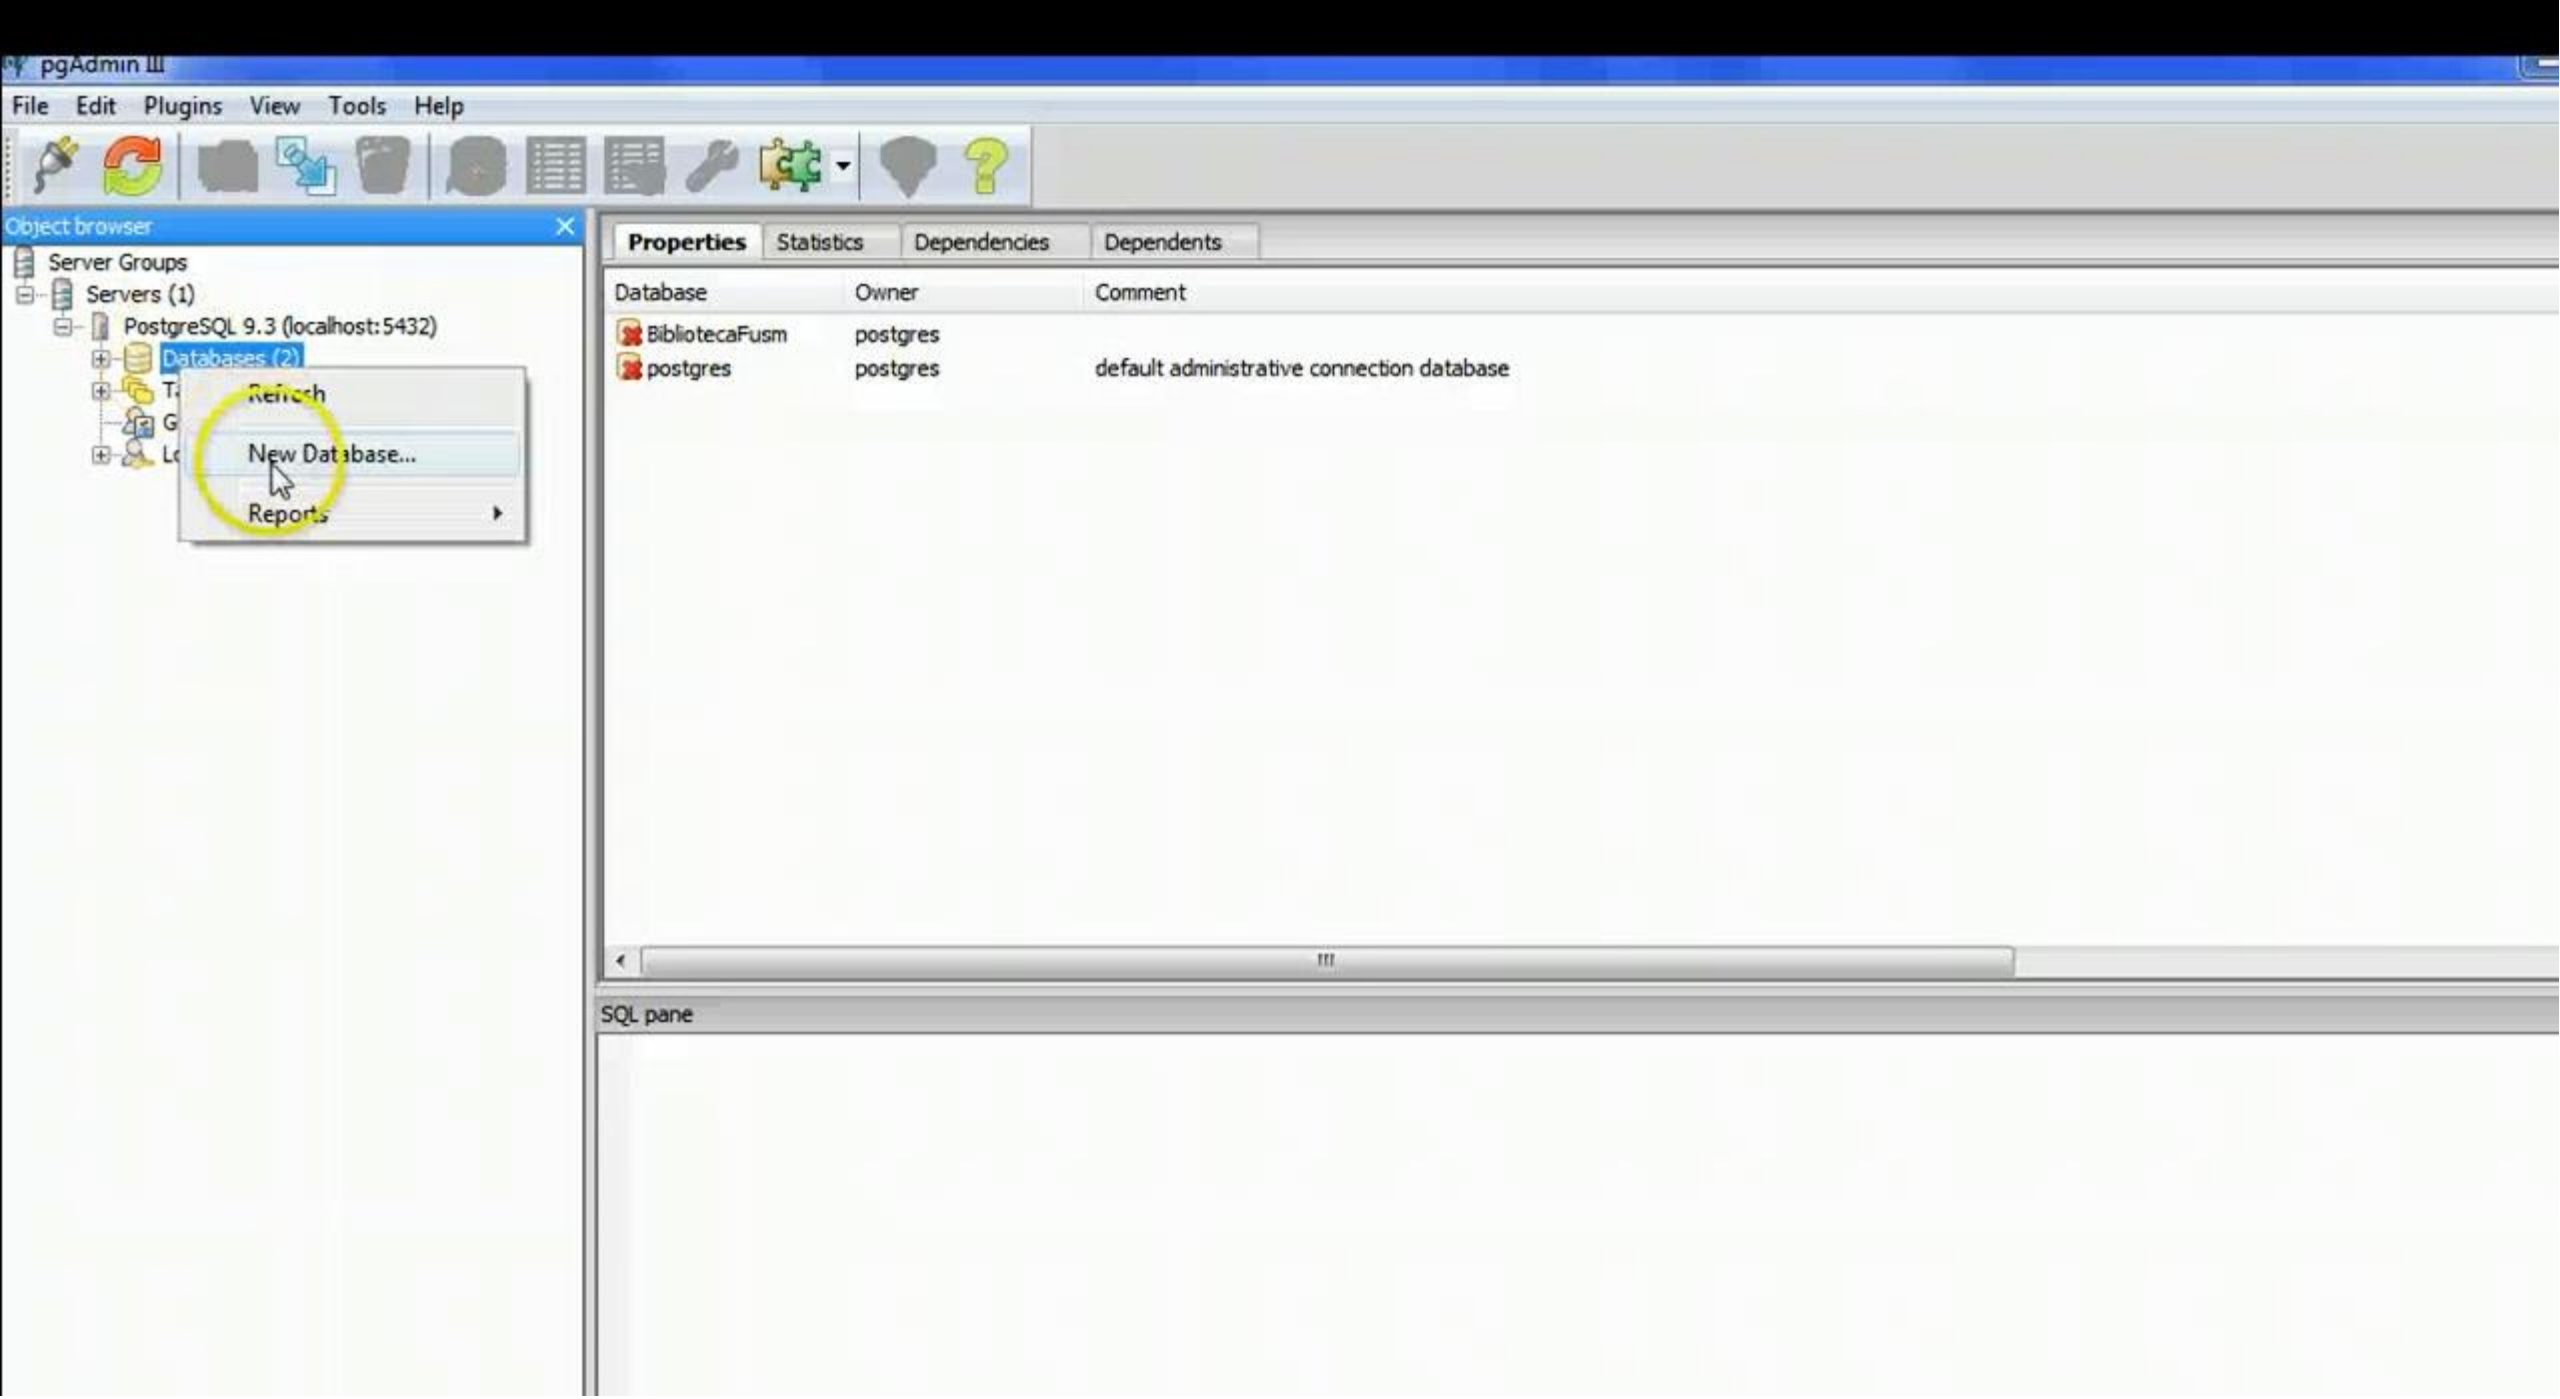
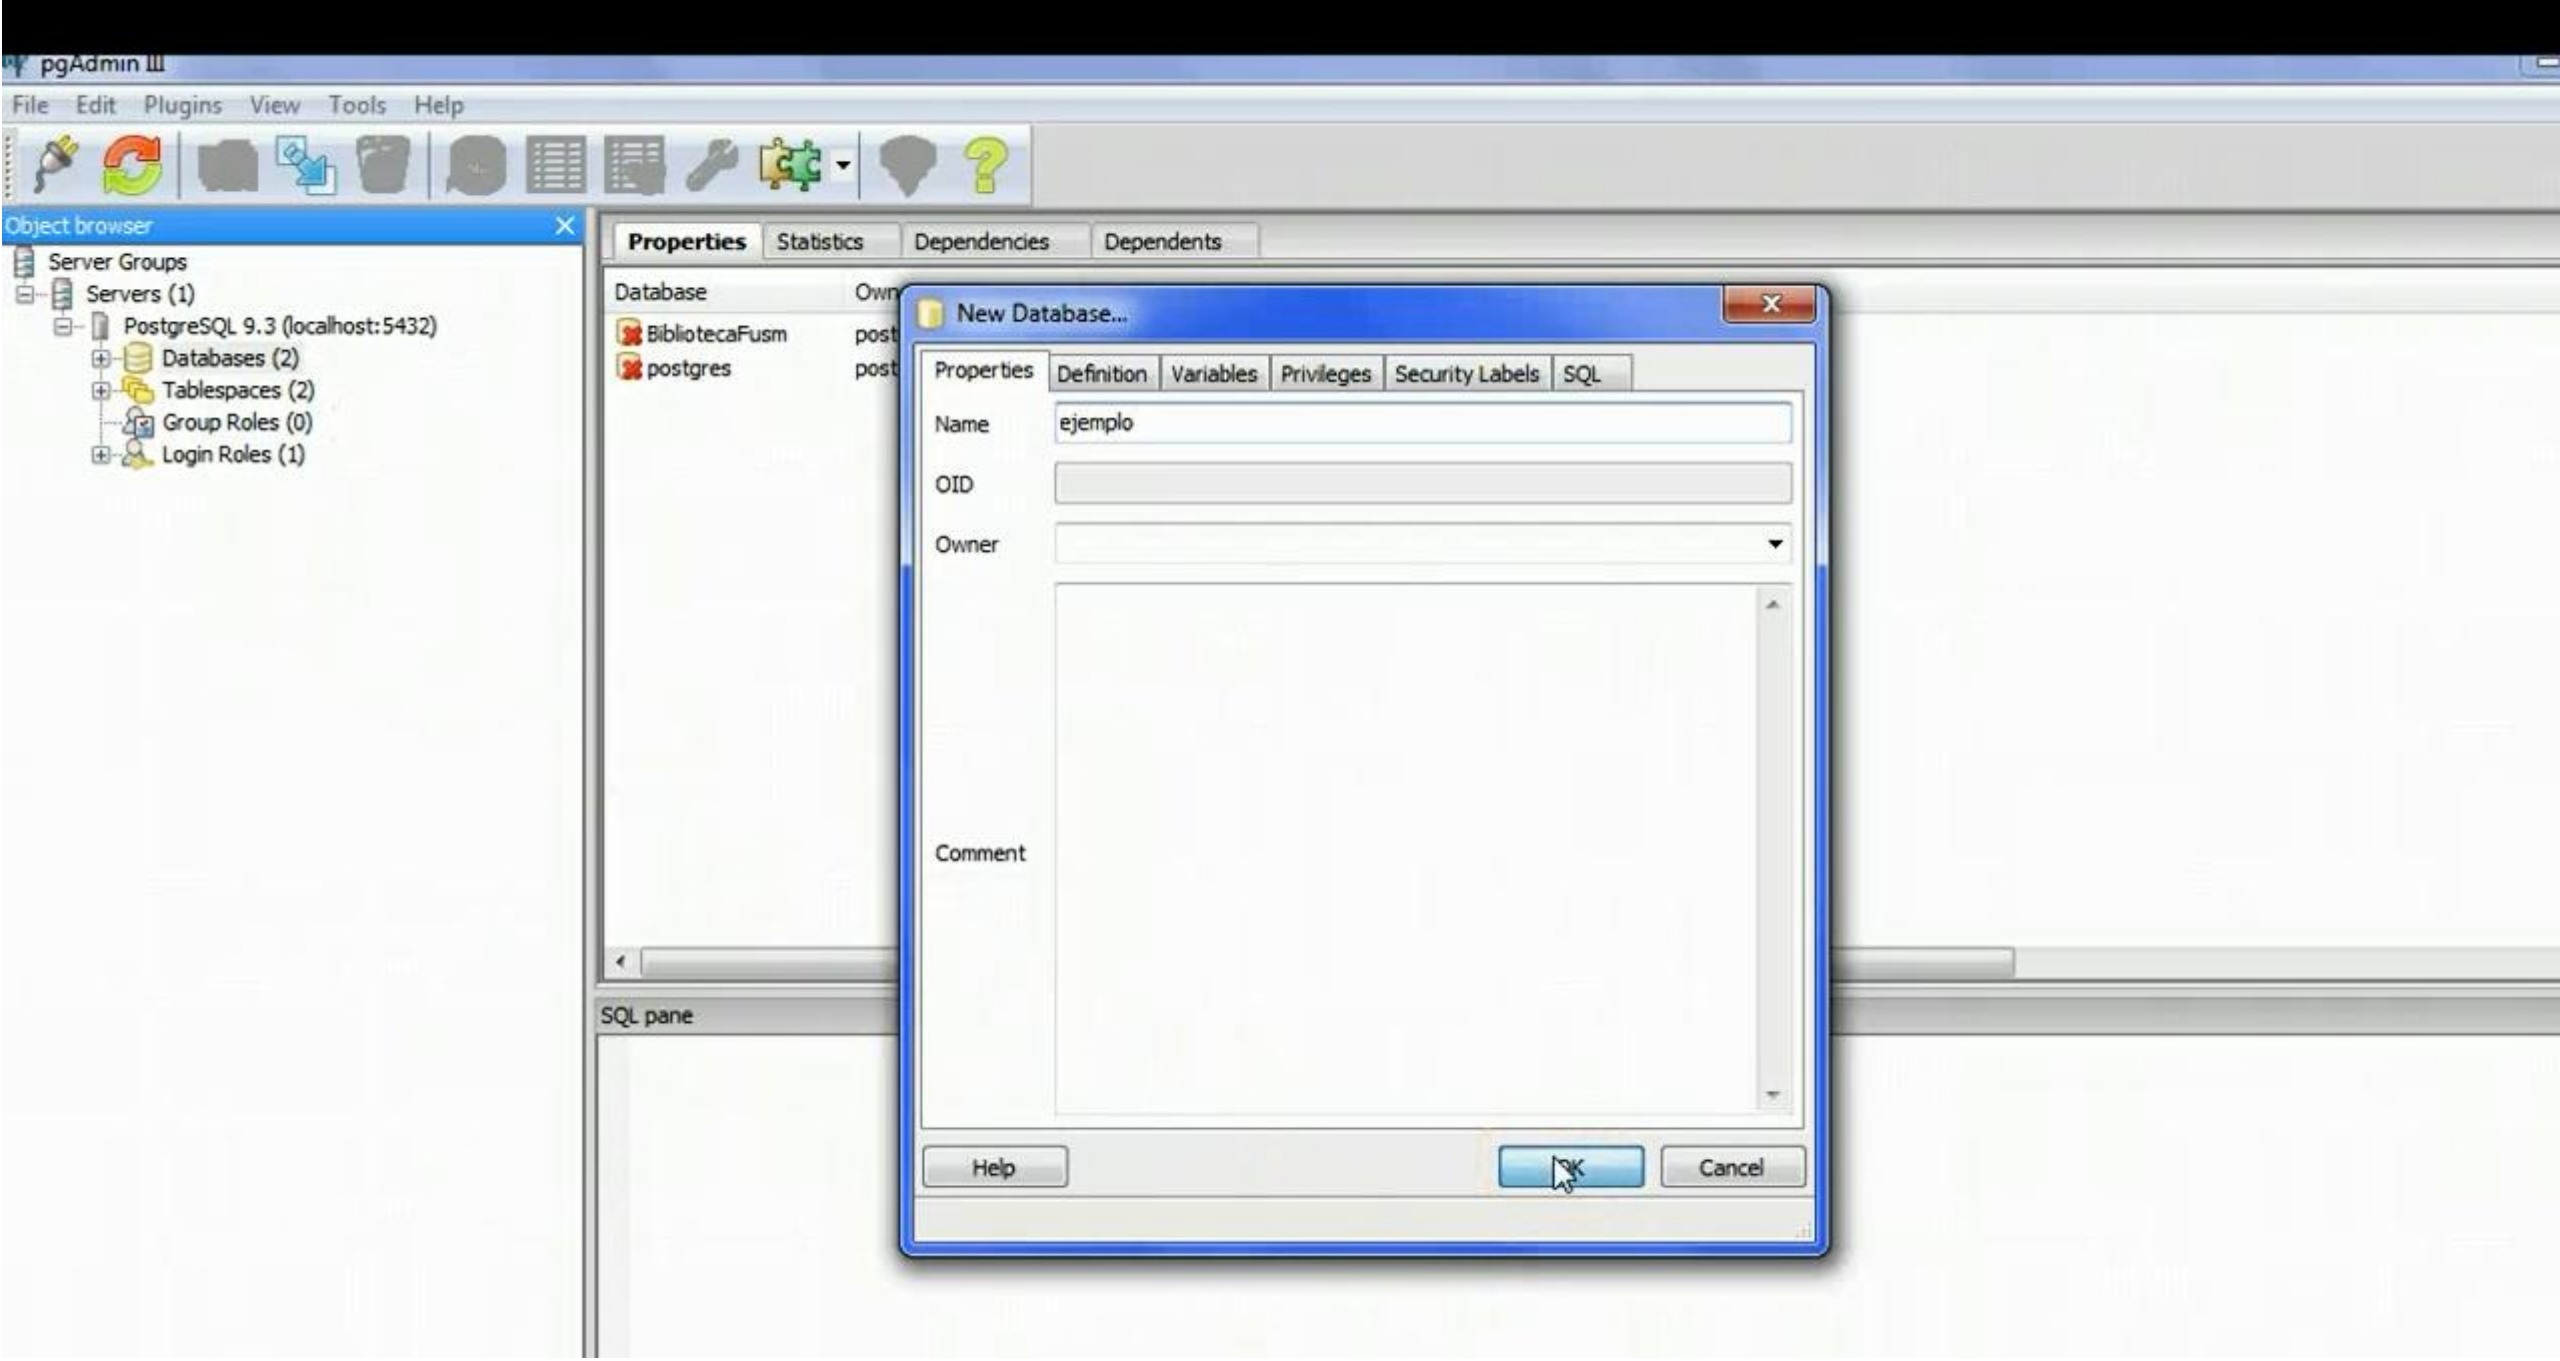
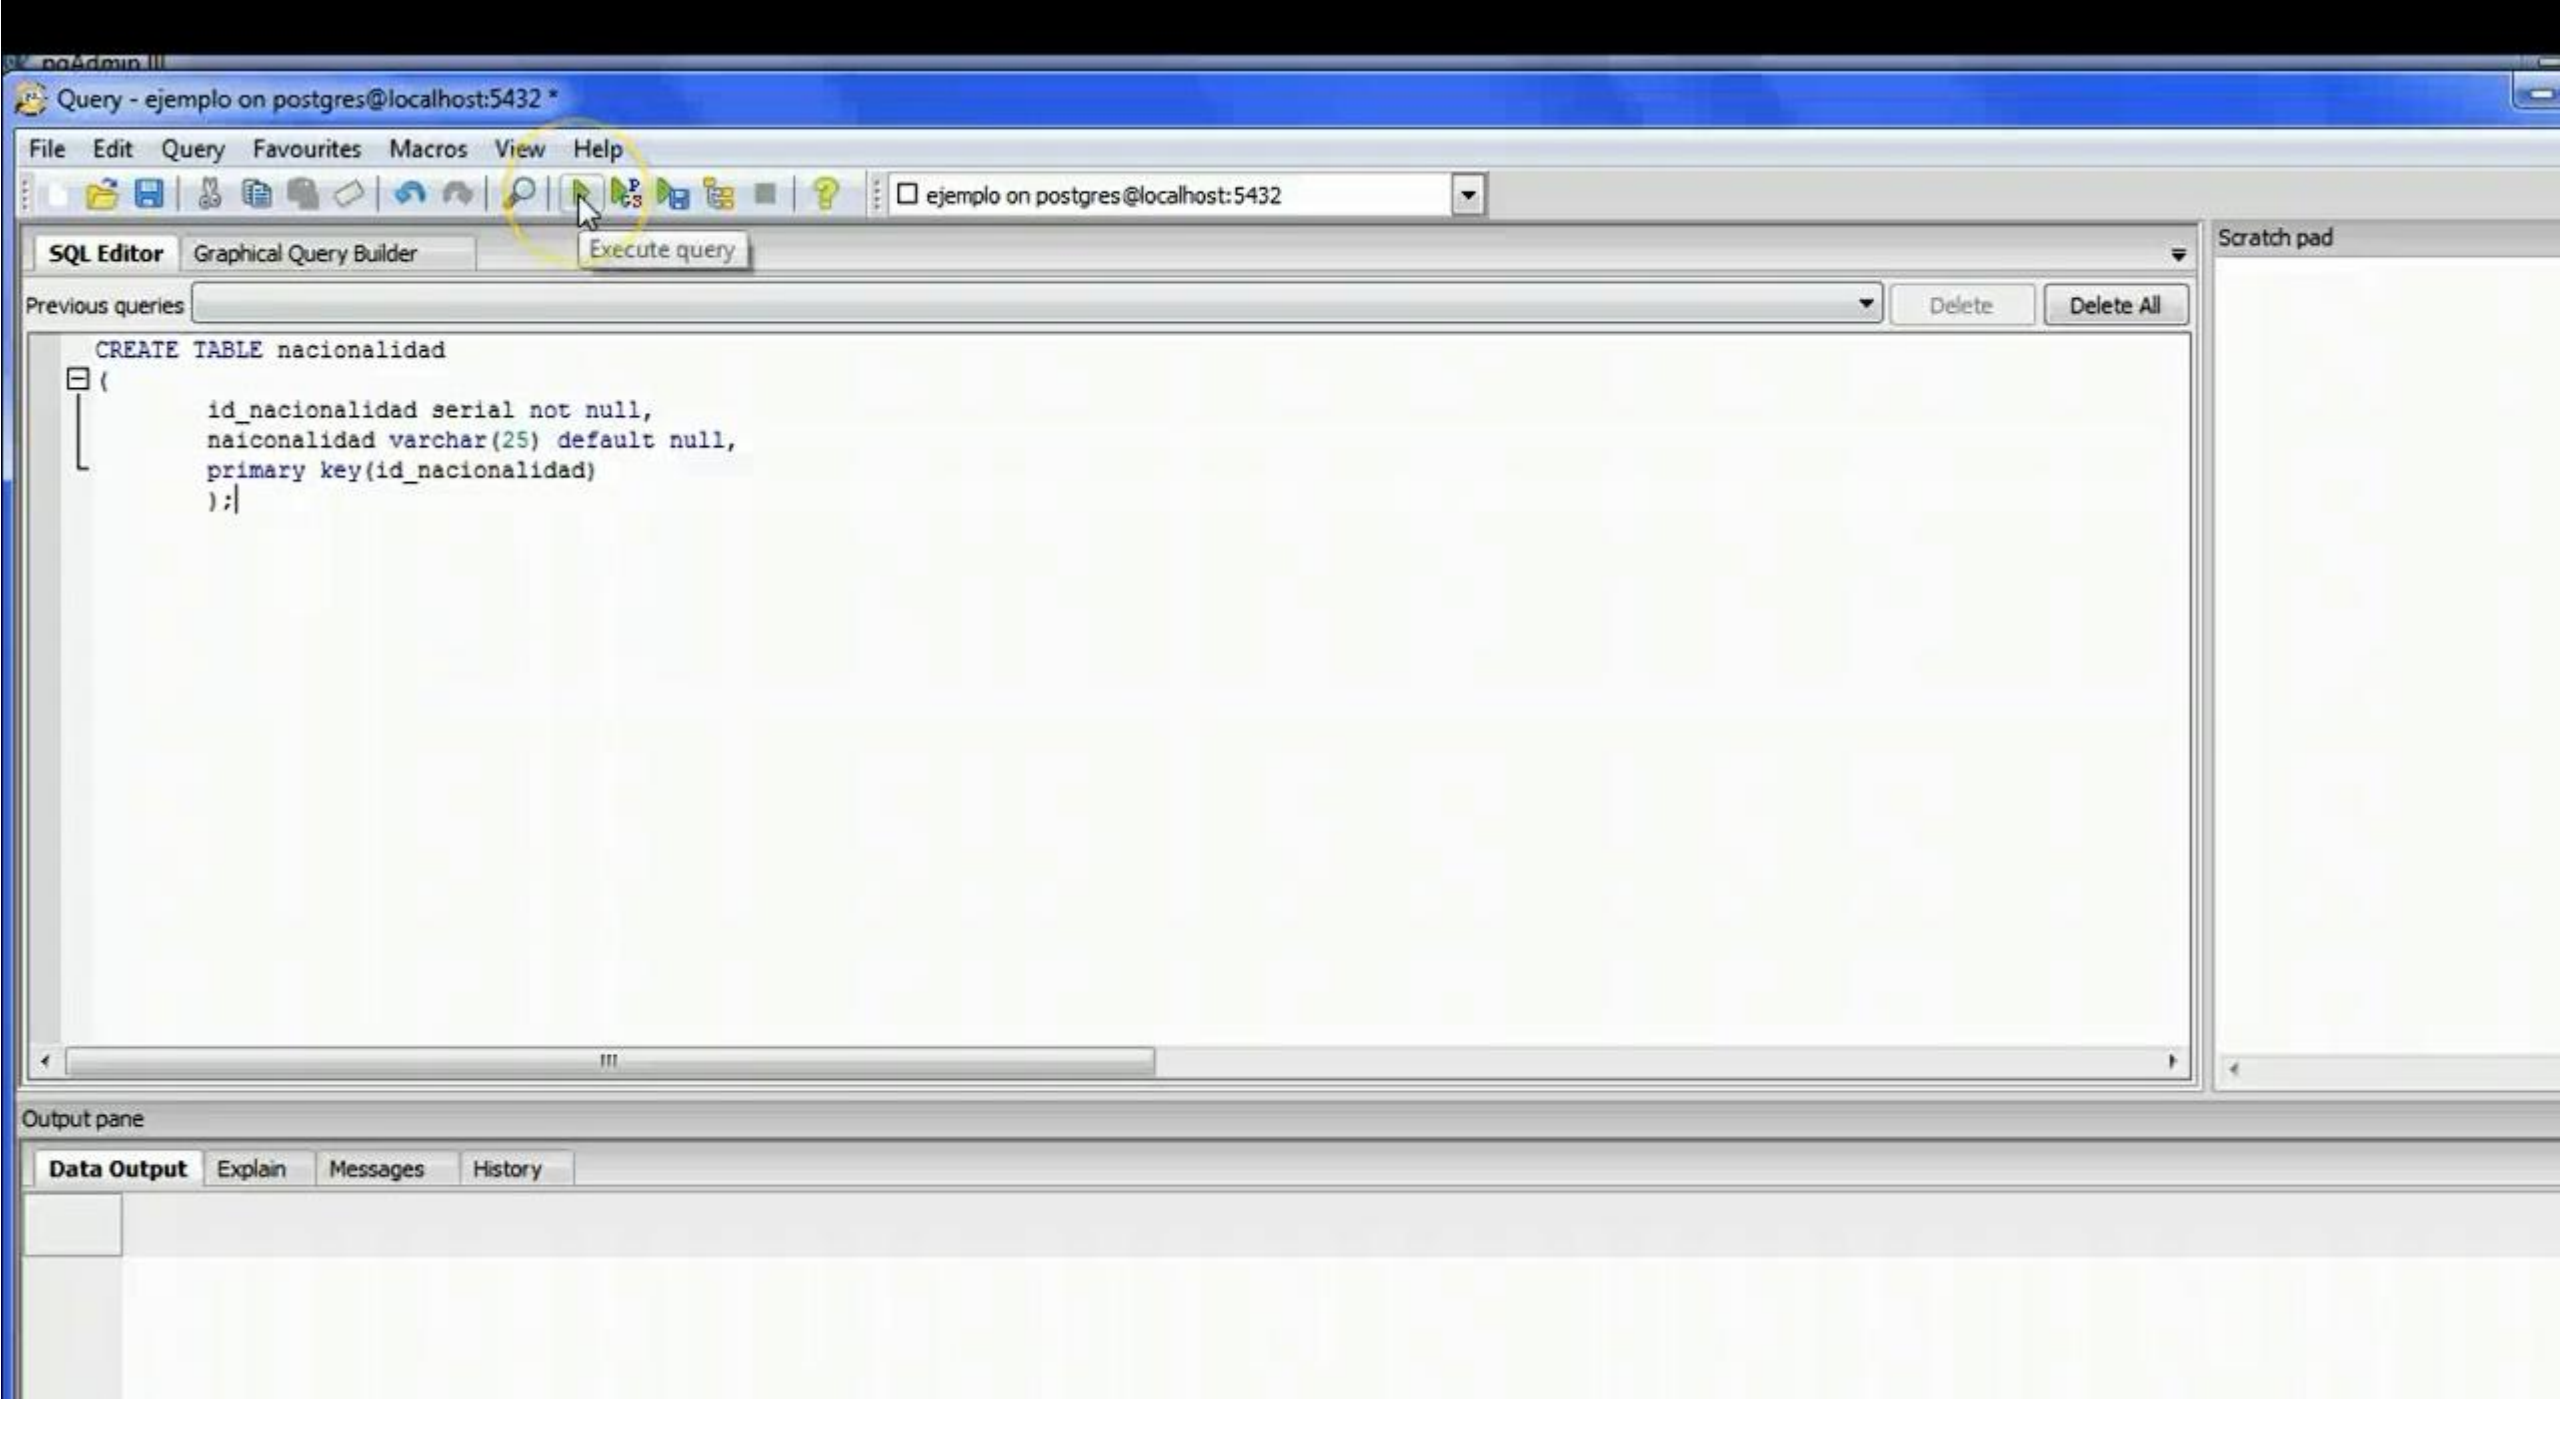
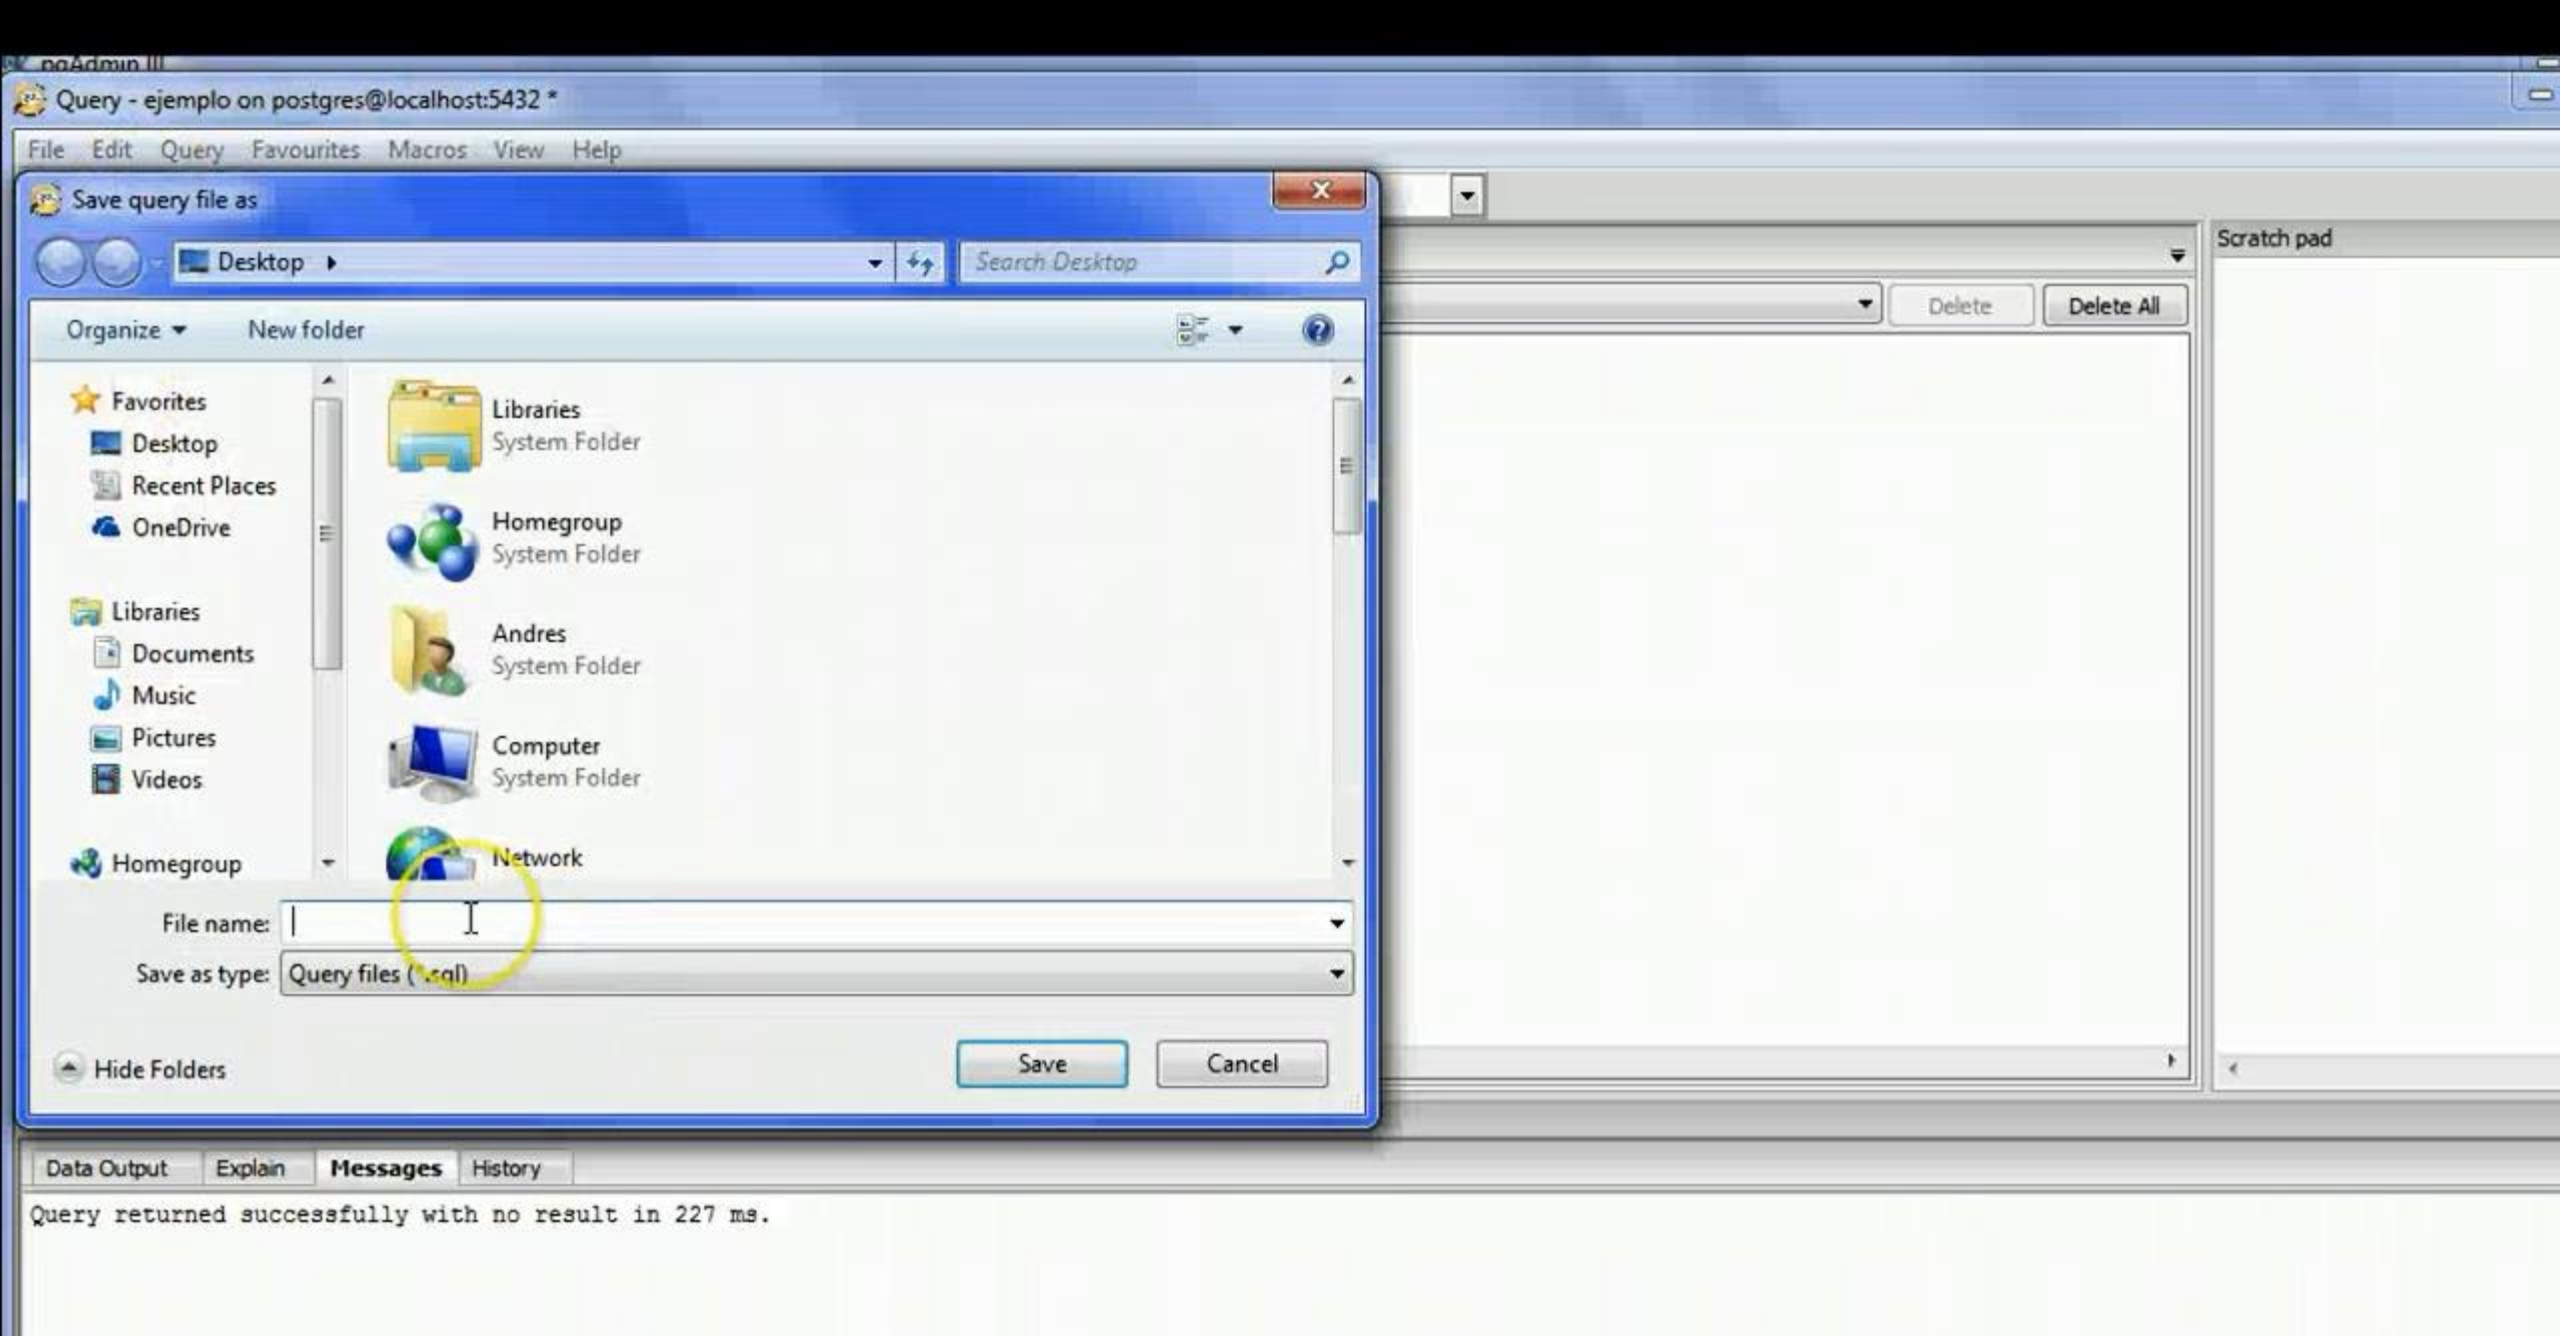
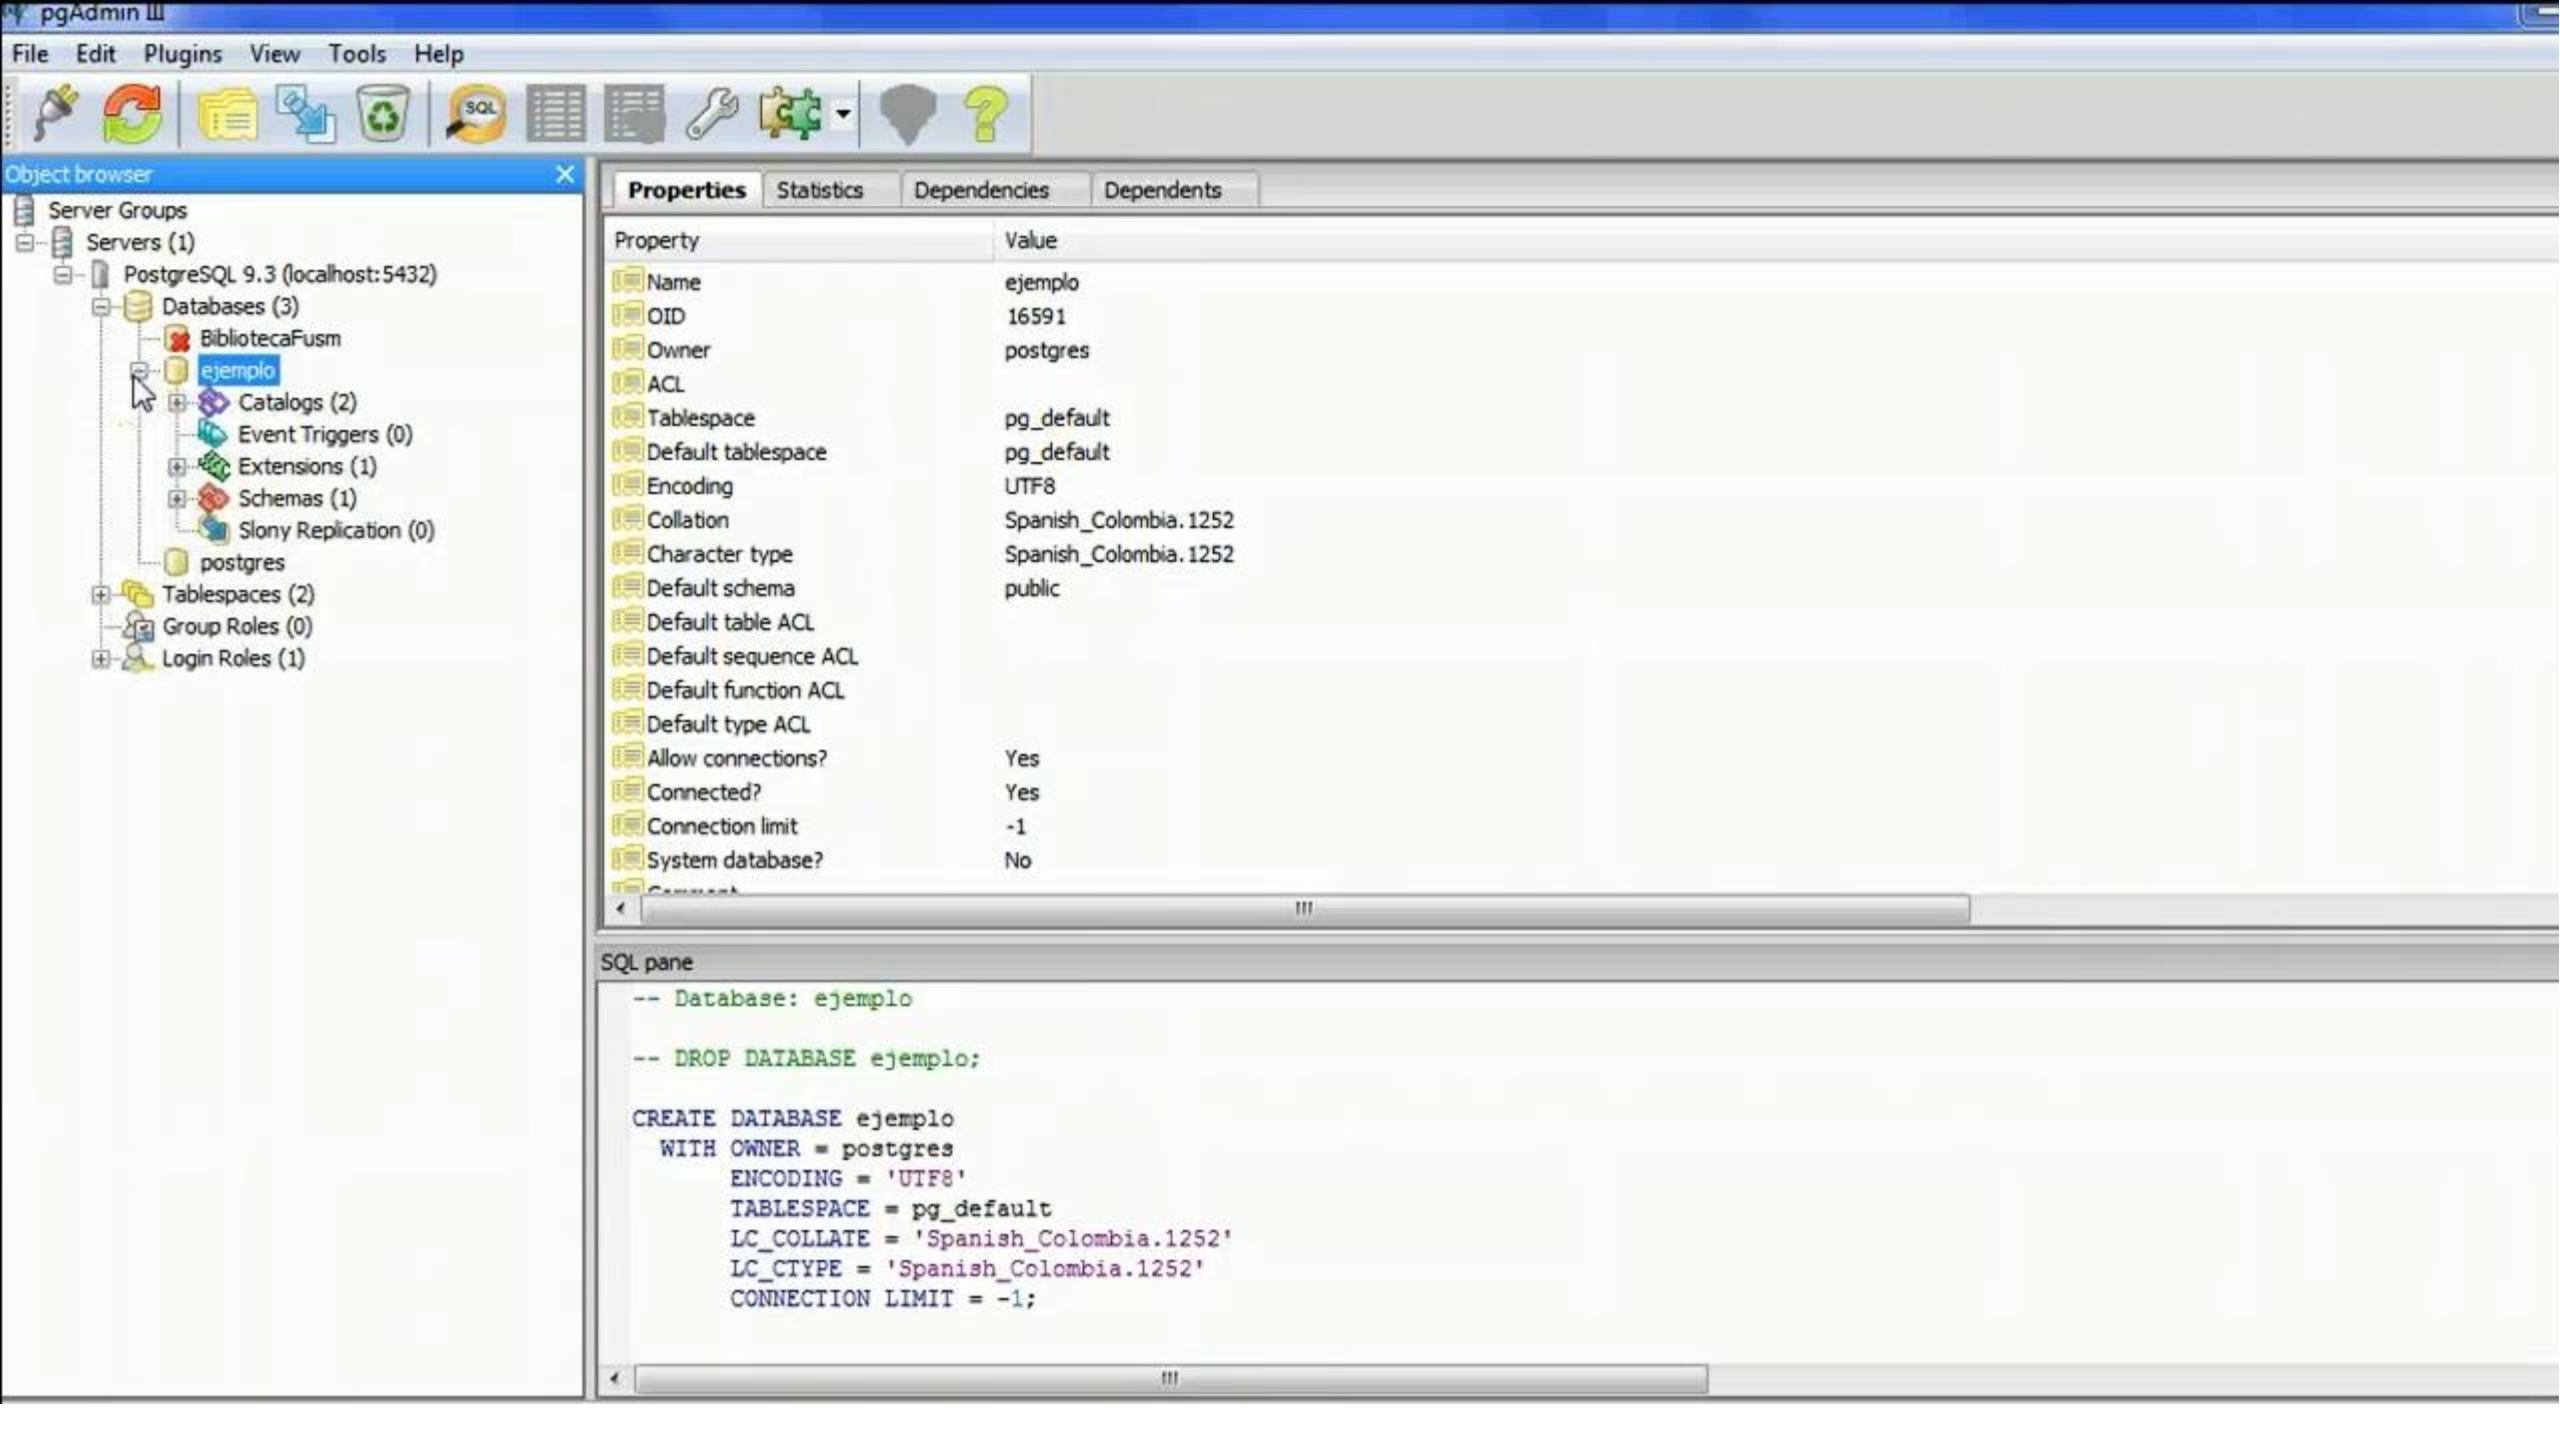

pgAdmin III
File Edit Plugins View Tools Help
Object browser
Server Groups
Servers (1)
PostgreSQL 9.3 (localhost:5432)
Properties
Property
Description
Service
Hostname
Host Address
Port
Service ID
Maintenance d
Username
Store password?
No
Restore environment?
No
Connected?
No
Connect to Server
Please enter password for user postgres
on server PostgreSQL 9.3 (localhost)
Store password
Help
OK
Cancel
SQL pane

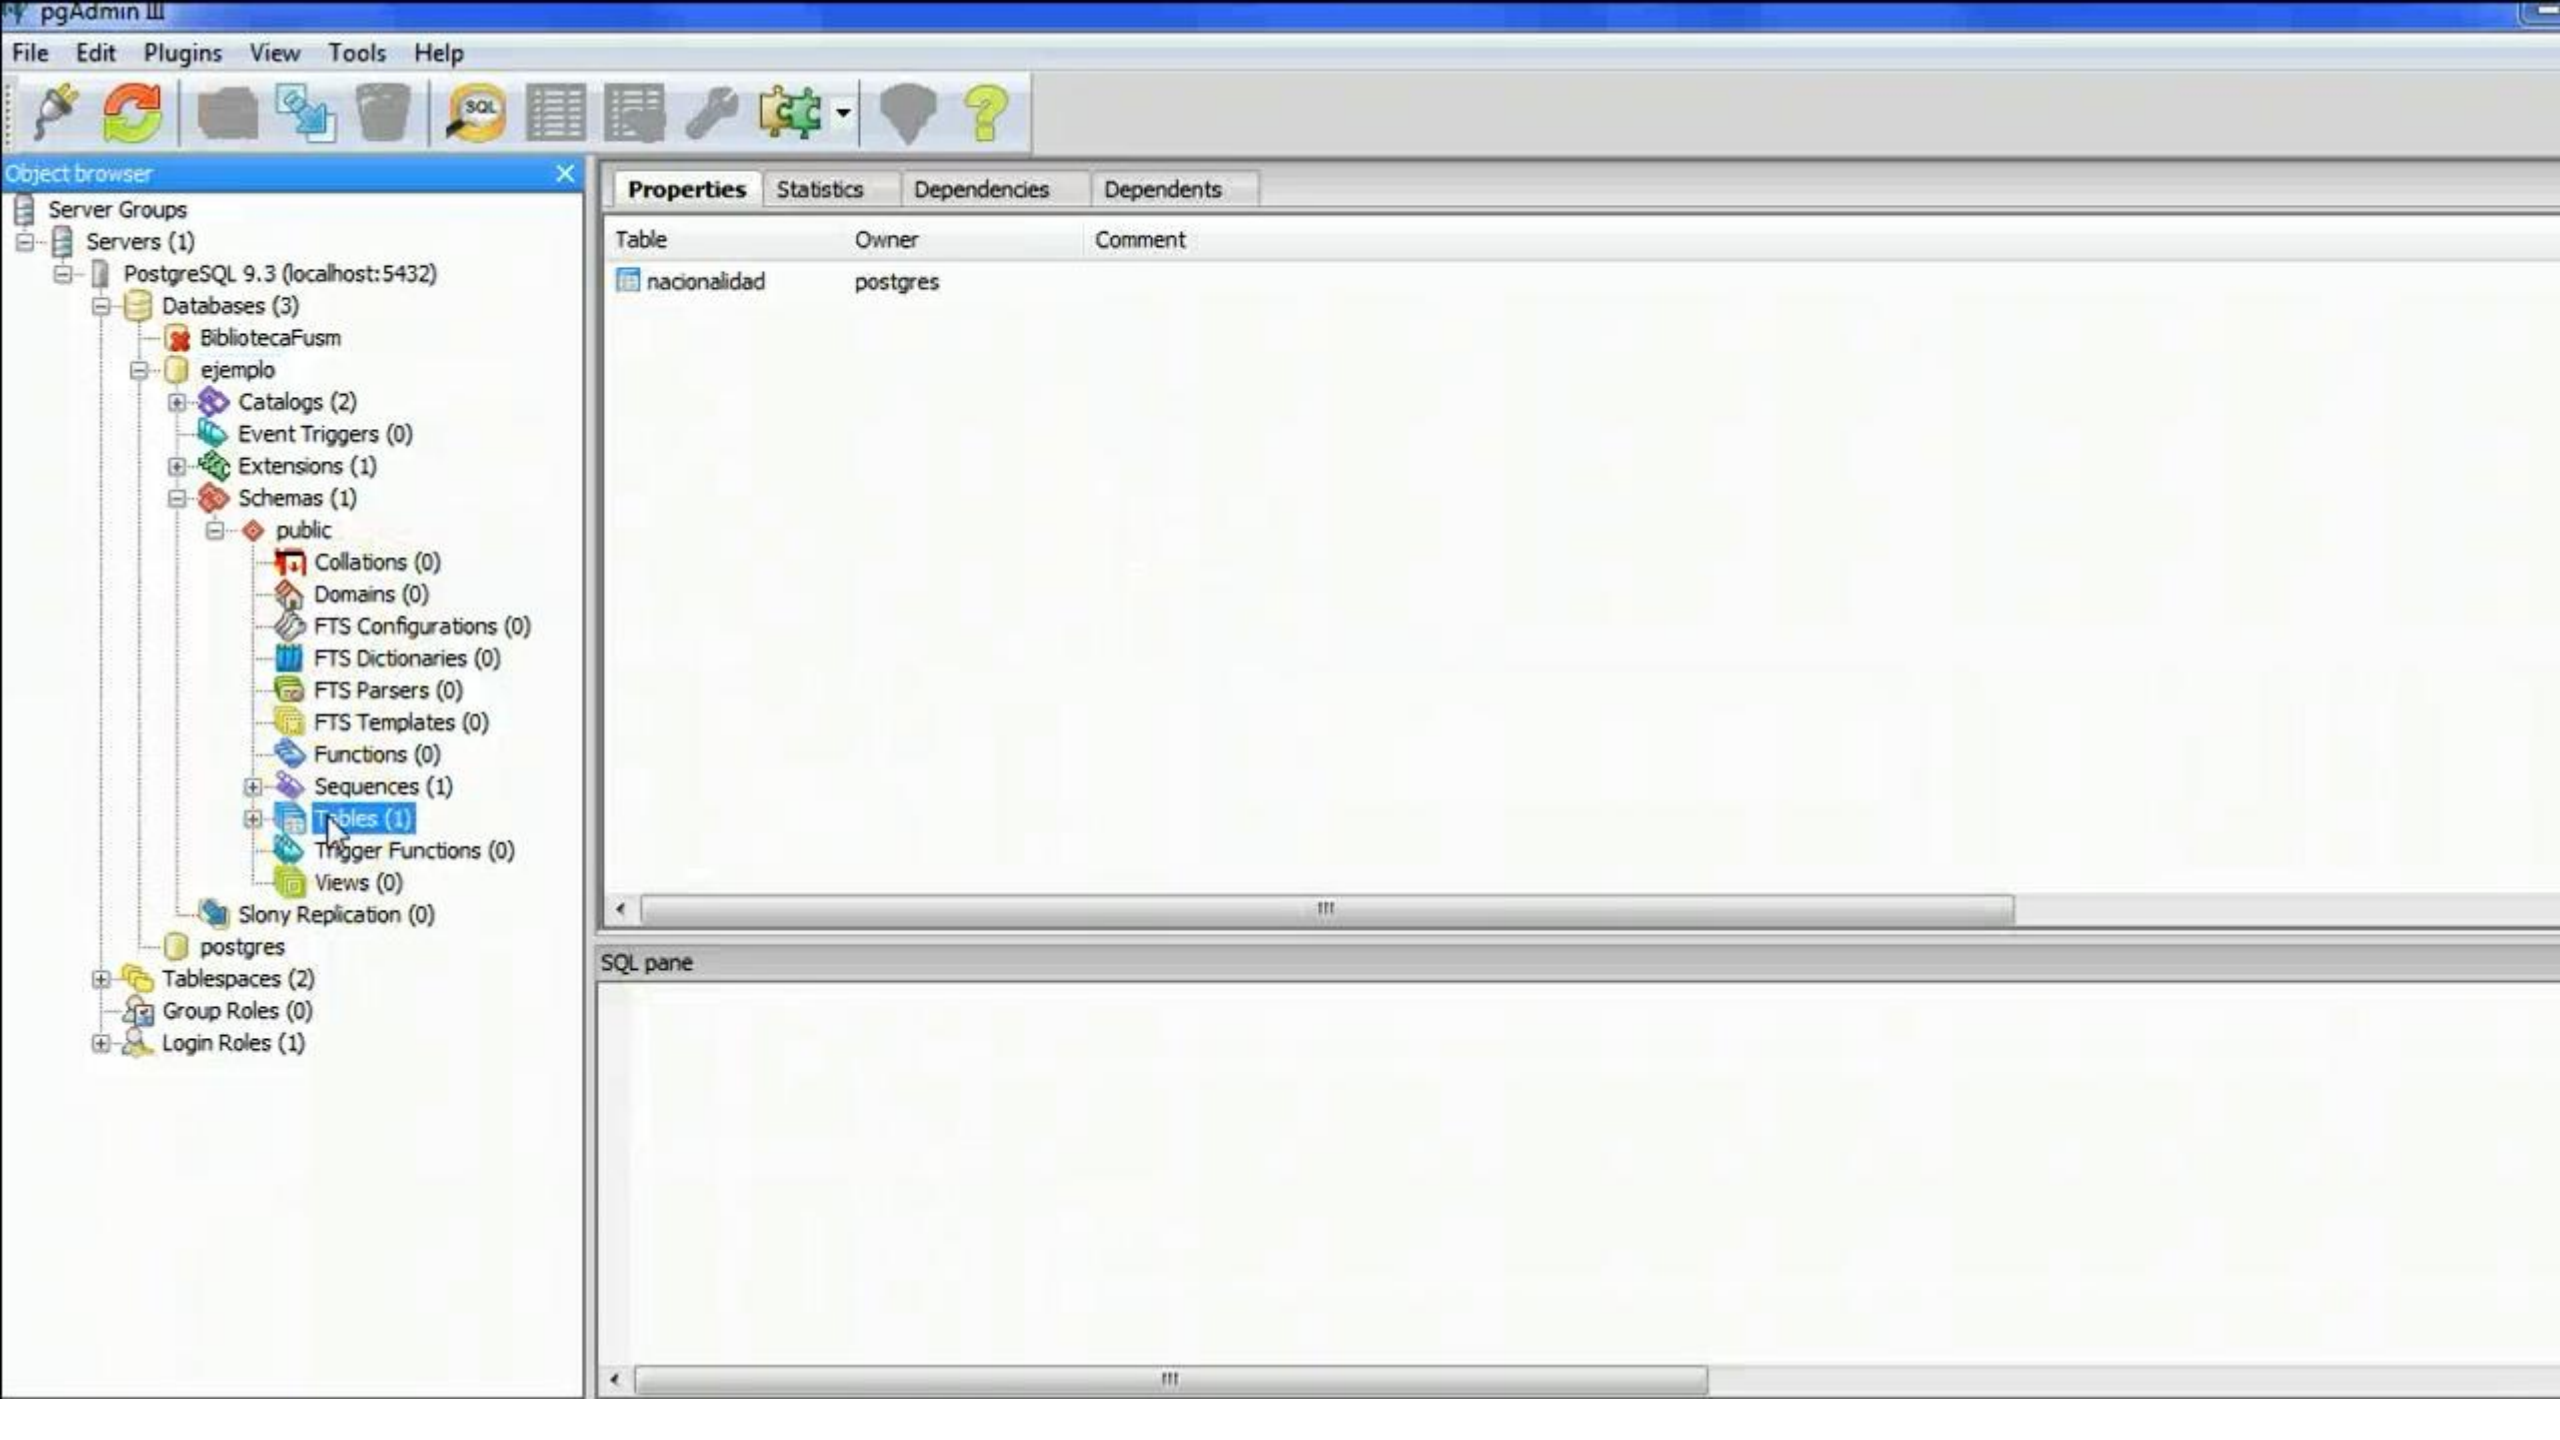

pgAdmin III
File Edit Plugins View Tools Help
Object browser
Server Groups
Servers (1)
PostgreSQL 9.3 (localhost:5432)
Databases (2)
Refresh
New Database...
Reports
Properties Statistics Dependencies Dependents
Database Owner Comment
BibliotecaFusm postgres
postgres postgres default administrative connection database
SQL pane

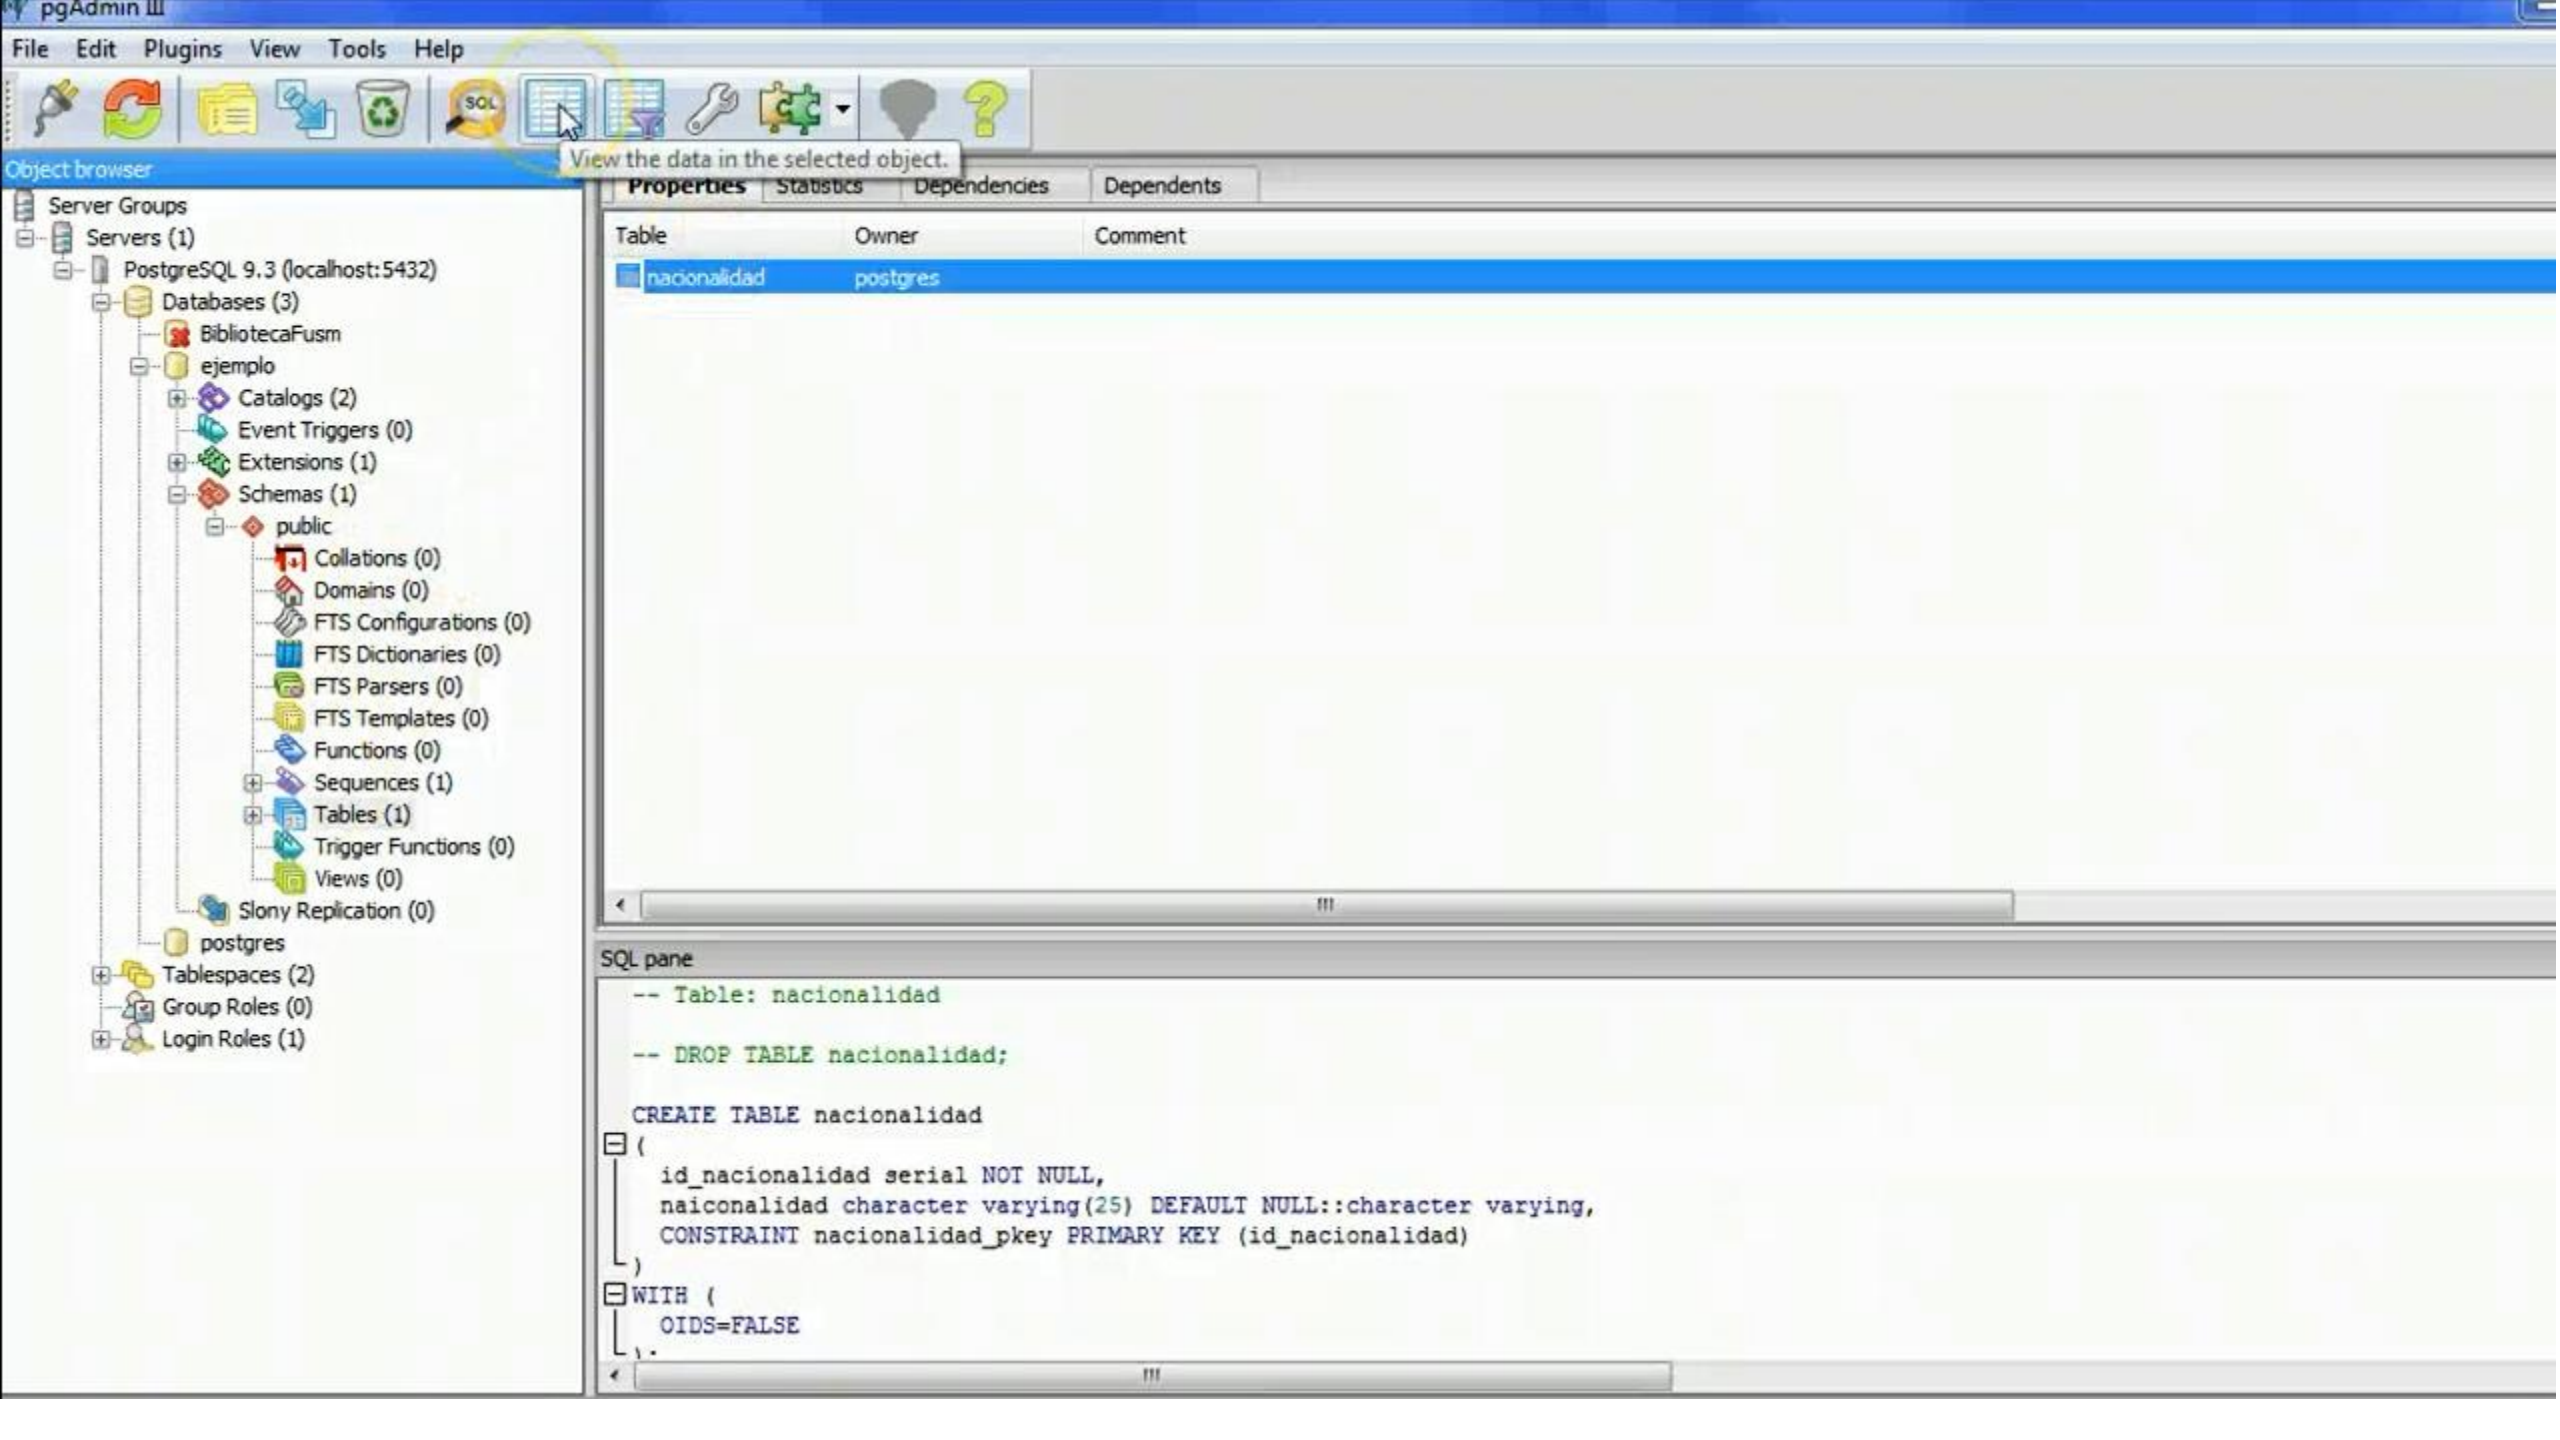

pgAdmin III
File Edit Plugins View Tools Help
Object browser
Server Groups
Servers (1)
PostgreSQL 9.3 (localhost:5432)
Databases (2)
Tablespaces (2)
Group Roles (0)
Login Roles (1)
Properties Statistics Dependencies Dependents
Database
BibliotecaFusm
postgres
SQL pane
New Database...
Properties Definition Variables Privileges Security Labels SQL
Name ejemplo
OID
Owner
Comment
Help
Cancel


Query - ejemplo on postgres@localhost:5432 *
File Edit Query Favourites Macros View Help
ejemplo on postgres@localhost:5432
Execute query
SQL Editor
Graphical Query Builder
Previous queries
Delete
Delete All
CREATE TABLE nacionalidad
(
id_nacionalidad serial not null,
naiconalidad varchar(25) default null,
primary key(id_nacionalidad)
);
Scratch pad
Output pane
Data Output
Explain
Messages
History

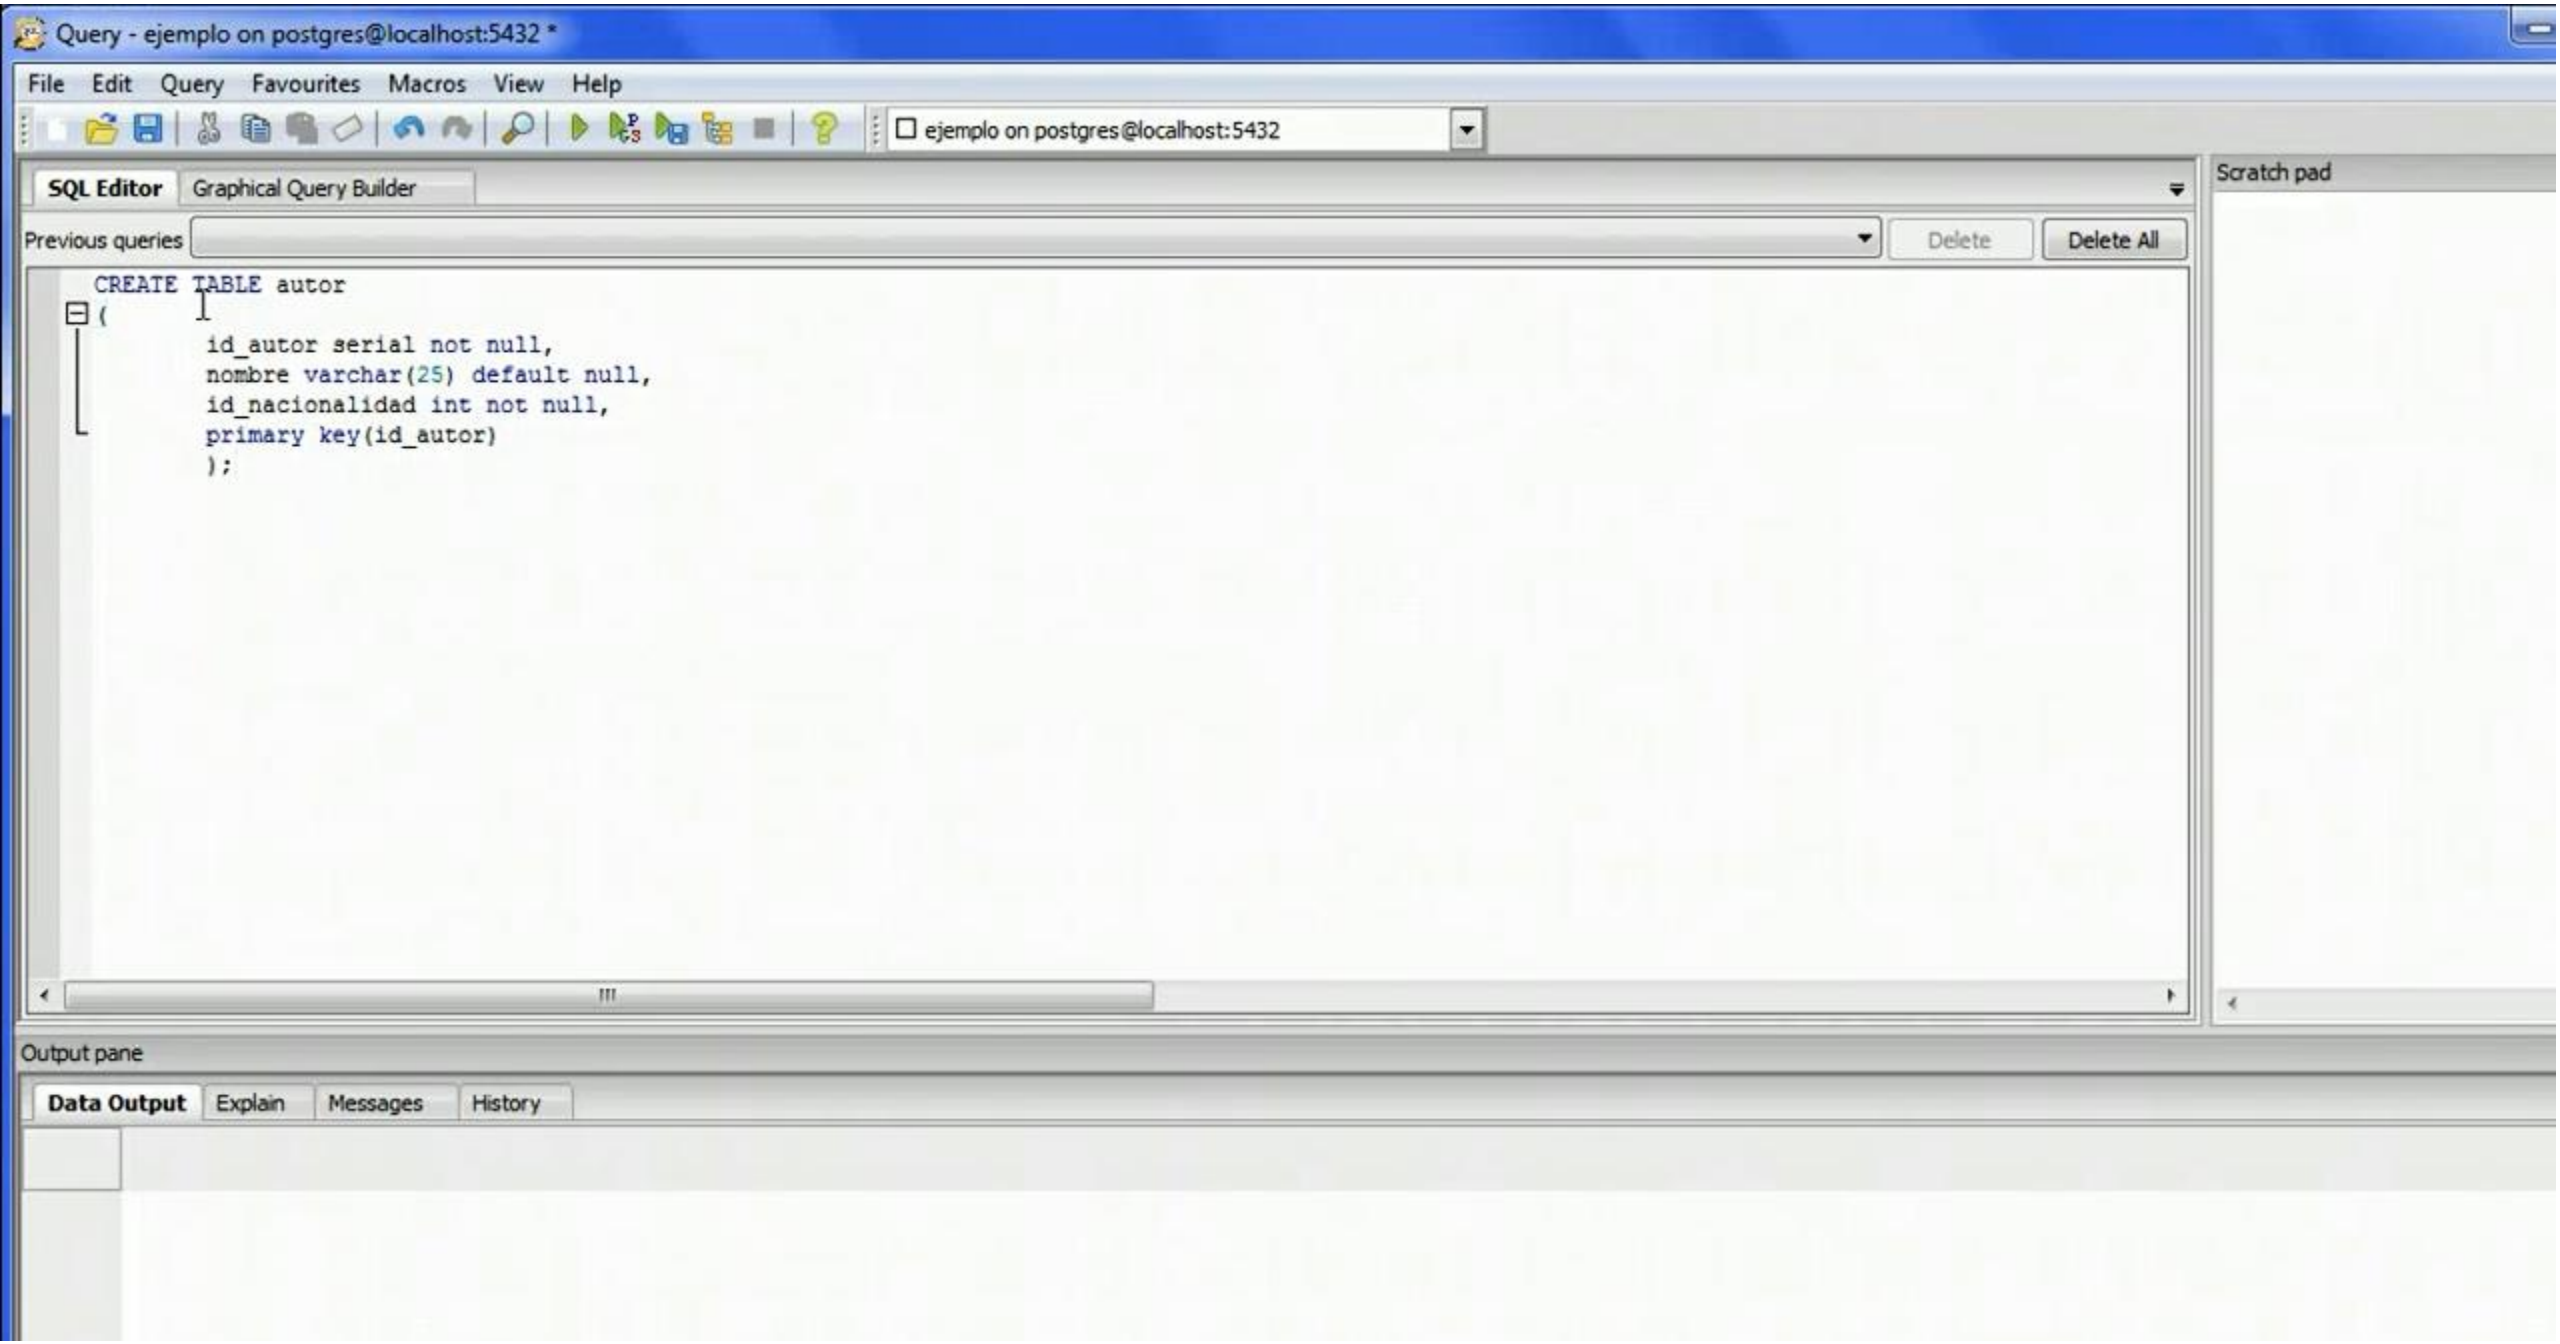

pgAdmin III
Query - ejemplo on postgres@localhost:5432 *
File Edit Query Favourites Macros View Help
Save query file as
Desktop
Search Desktop
Organize
New folder
Favorites
Desktop
Recent Places
OneDrive
Libraries
Documents
Music
Pictures
Videos
Homegroup
Libraries
System Folder
Homegroup
System Folder
Andres
System Folder
Computer
System Folder
Network
File name:
Save as type:
Query files (*.sql)
Hide Folders
Save
Cancel
Delete
Delete All
Scratch pad
Data Output
Explain
Messages
History
Query returned successfully with no result in 227 ms.


pgAdmin III
File Edit Plugins View Tools Help
Object browser
Server Groups
Servers (1)
PostgreSQL 9.3 (localhost:5432)
Databases (3)
BibliotecaFusm
ejemplo
Catalogs (2)
Event Triggers (0)
Extensions (1)
Schemas (1)
Slony Replication (0)
postgres
Tablespaces (2)
Group Roles (0)
Login Roles (1)
Properties
Statistics
Dependencies
Dependents
Property
Value
Name
ejemplo
OID
16591
Owner
postgres
ACL
Tablespace
pg_default
Default tablespace
pg_default
Encoding
UTF8
Collation
Spanish_Colombia.1252
Character type
Spanish_Colombia.1252
Default schema
public
Default table ACL
Default sequence ACL
Default function ACL
Default type ACL
Allow connections?
Yes
Connected?
Yes
Connection limit
-1
System database?
No
SQL pane
-- Database: ejemplo
-- DROP DATABASE ejemplo;
CREATE DATABASE ejemplo
WITH OWNER = postgres
ENCODING = 'UTF8'
TABLESPACE = pg_default
LC_COLLATE = 'Spanish_Colombia.1252'
LC_CTYPE = 'Spanish_Colombia.1252'
CONNECTION LIMIT = -1;

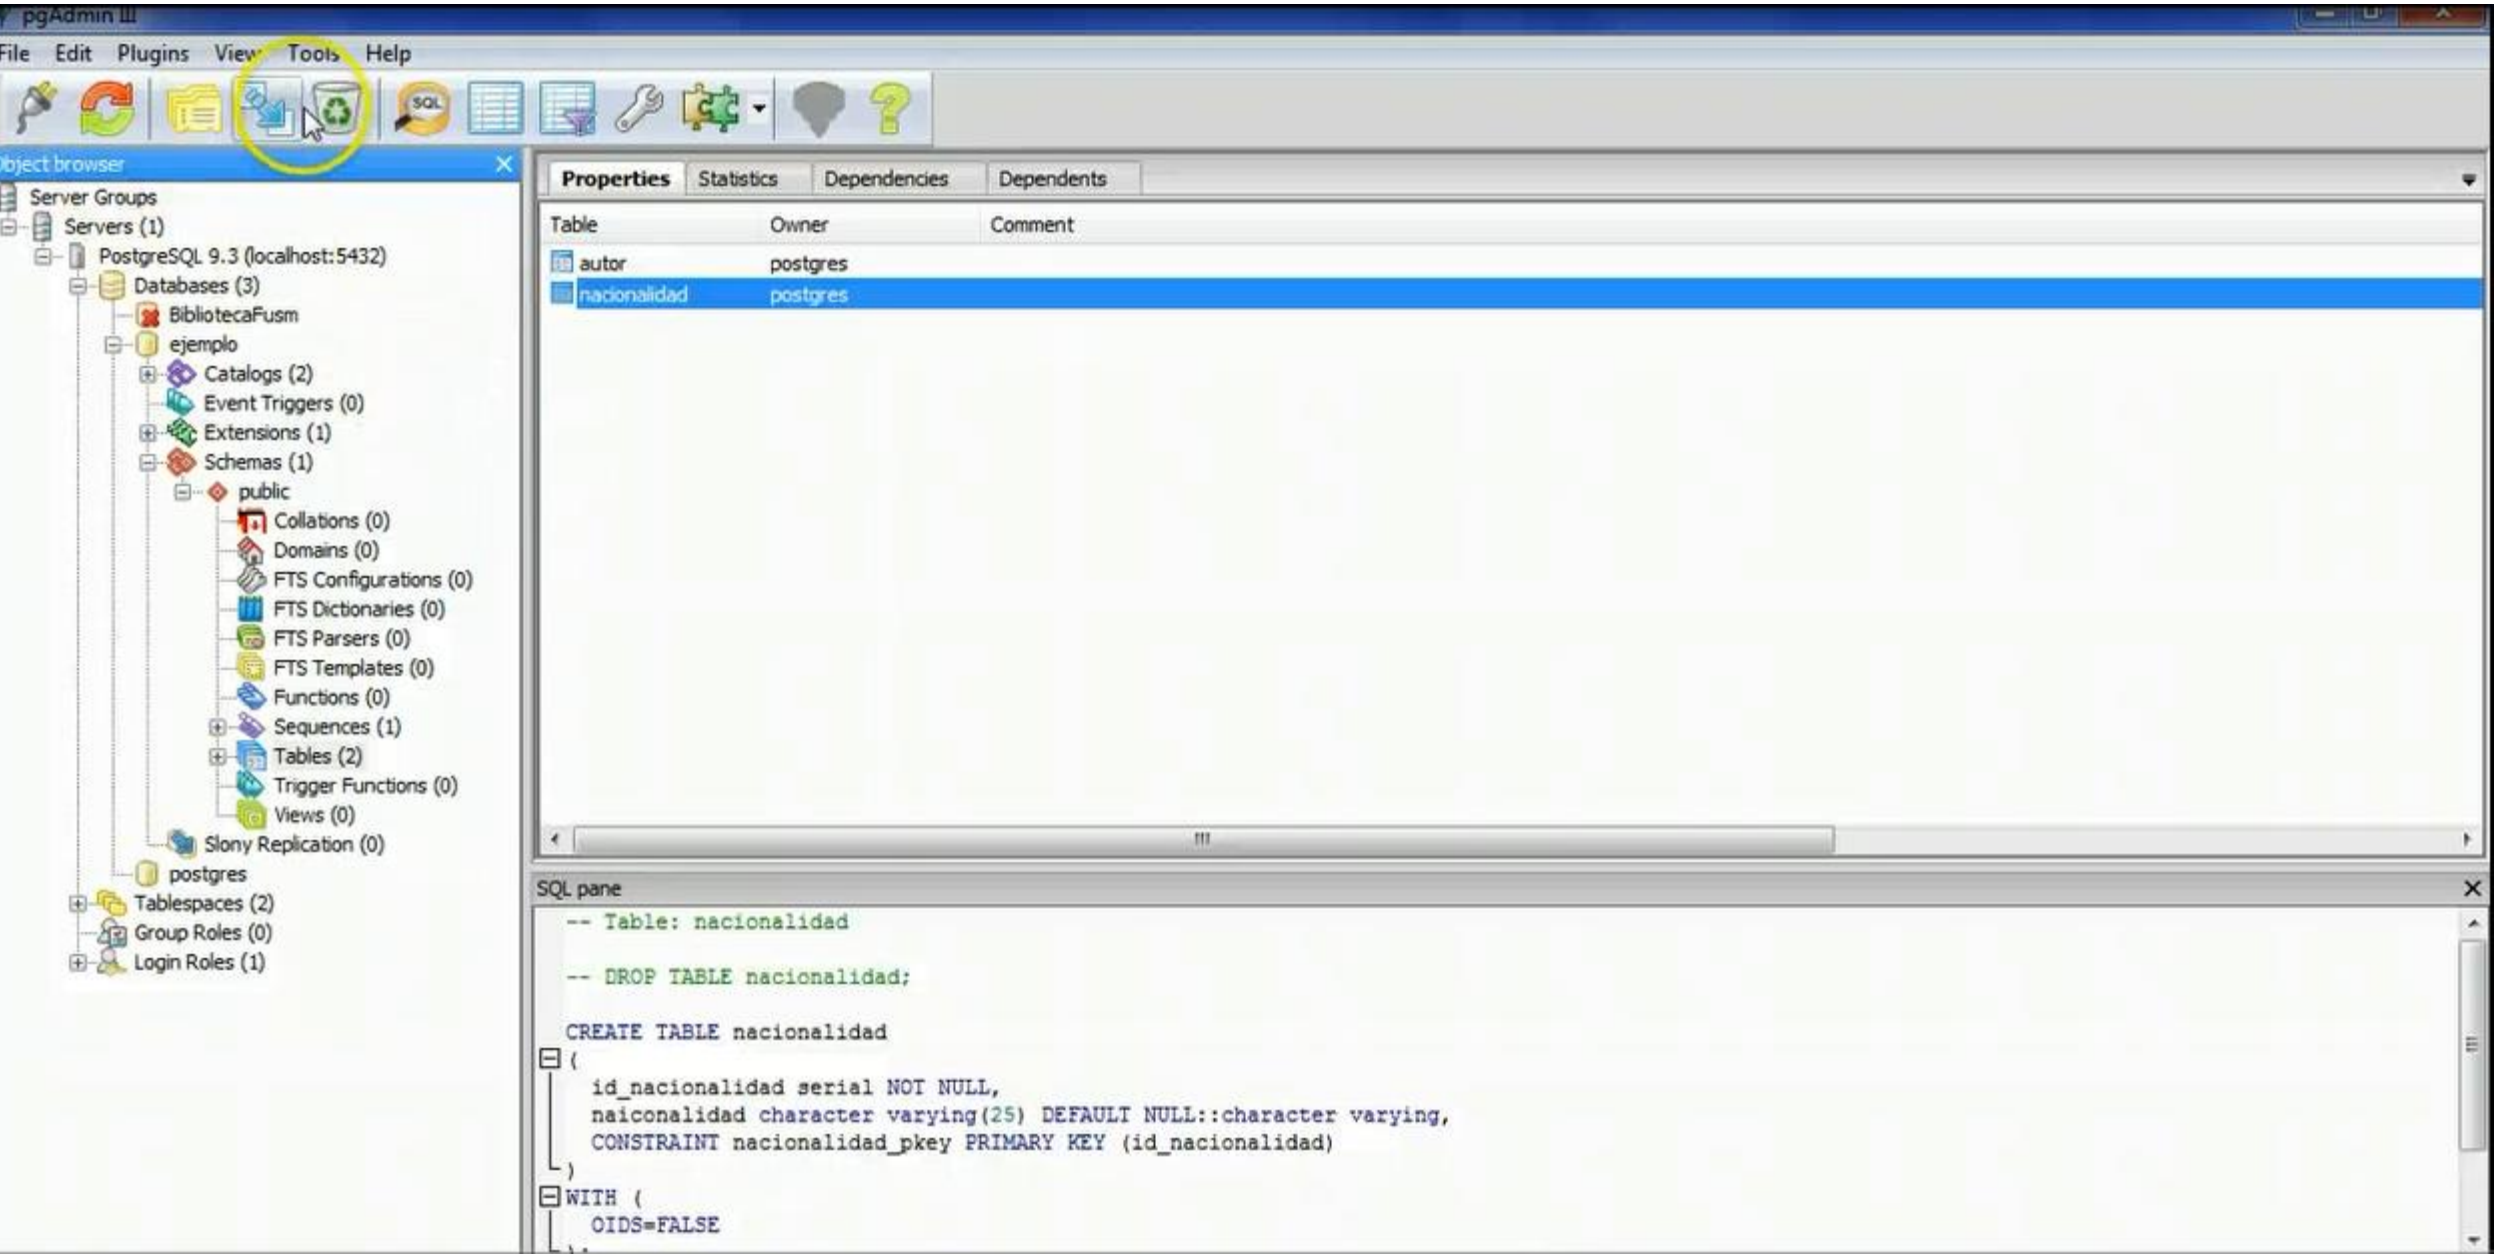

pgAdmin III
File Edit Plugins View Tools Help
Object browser
Server Groups
Servers (1)
PostgreSQL 9.3 (localhost:5432)
Databases (3)
BibliotecaFusm
ejemplo
Catalogs (2)
Event Triggers (0)
Extensions (1)
Schemas (1)
public
Collations (0)
Domains (0)
FTS Configurations (0)
FTS Dictionaries (0)
FTS Parsers (0)
FTS Templates (0)
Functions (0)
Sequences (1)
Tables (1)
Trigger Functions (0)
Views (0)
Slony Replication (0)
postgres
Tablespaces (2)
Group Roles (0)
Login Roles (1)
Properties
Statistics
Dependencies
Dependents
Table
Owner
Comment
nacionalidad
postgres
SQL pane


pgAdmin III
File Edit Plugins View Tools Help
View the data in the selected object.
Object browser
Server Groups
Servers (1)
PostgreSQL 9.3 (localhost:5432)
Databases (3)
BibliotecaFusm
ejemplo
Catalogs (2)
Event Triggers (0)
Extensions (1)
Schemas (1)
public
Collations (0)
Domains (0)
FTS Configurations (0)
FTS Dictionaries (0)
FTS Parsers (0)
FTS Templates (0)
Functions (0)
Sequences (1)
Tables (1)
Trigger Functions (0)
Views (0)
Slony Replication (0)
postgres
Tablespaces (2)
Group Roles (0)
Login Roles (1)
Properties Statistics Dependencies Dependents
Table Owner Comment
nacionalidad postgres
SQL pane
-- Table: nacionalidad
-- DROP TABLE nacionalidad;
CREATE TABLE nacionalidad
(
id_nacionalidad serial NOT NULL,
naiconalidad character varying(25) DEFAULT NULL::character varying,
CONSTRAINT nacionalidad_pkey PRIMARY KEY (id_nacionalidad)
)
WITH (
OIDS=FALSE
);

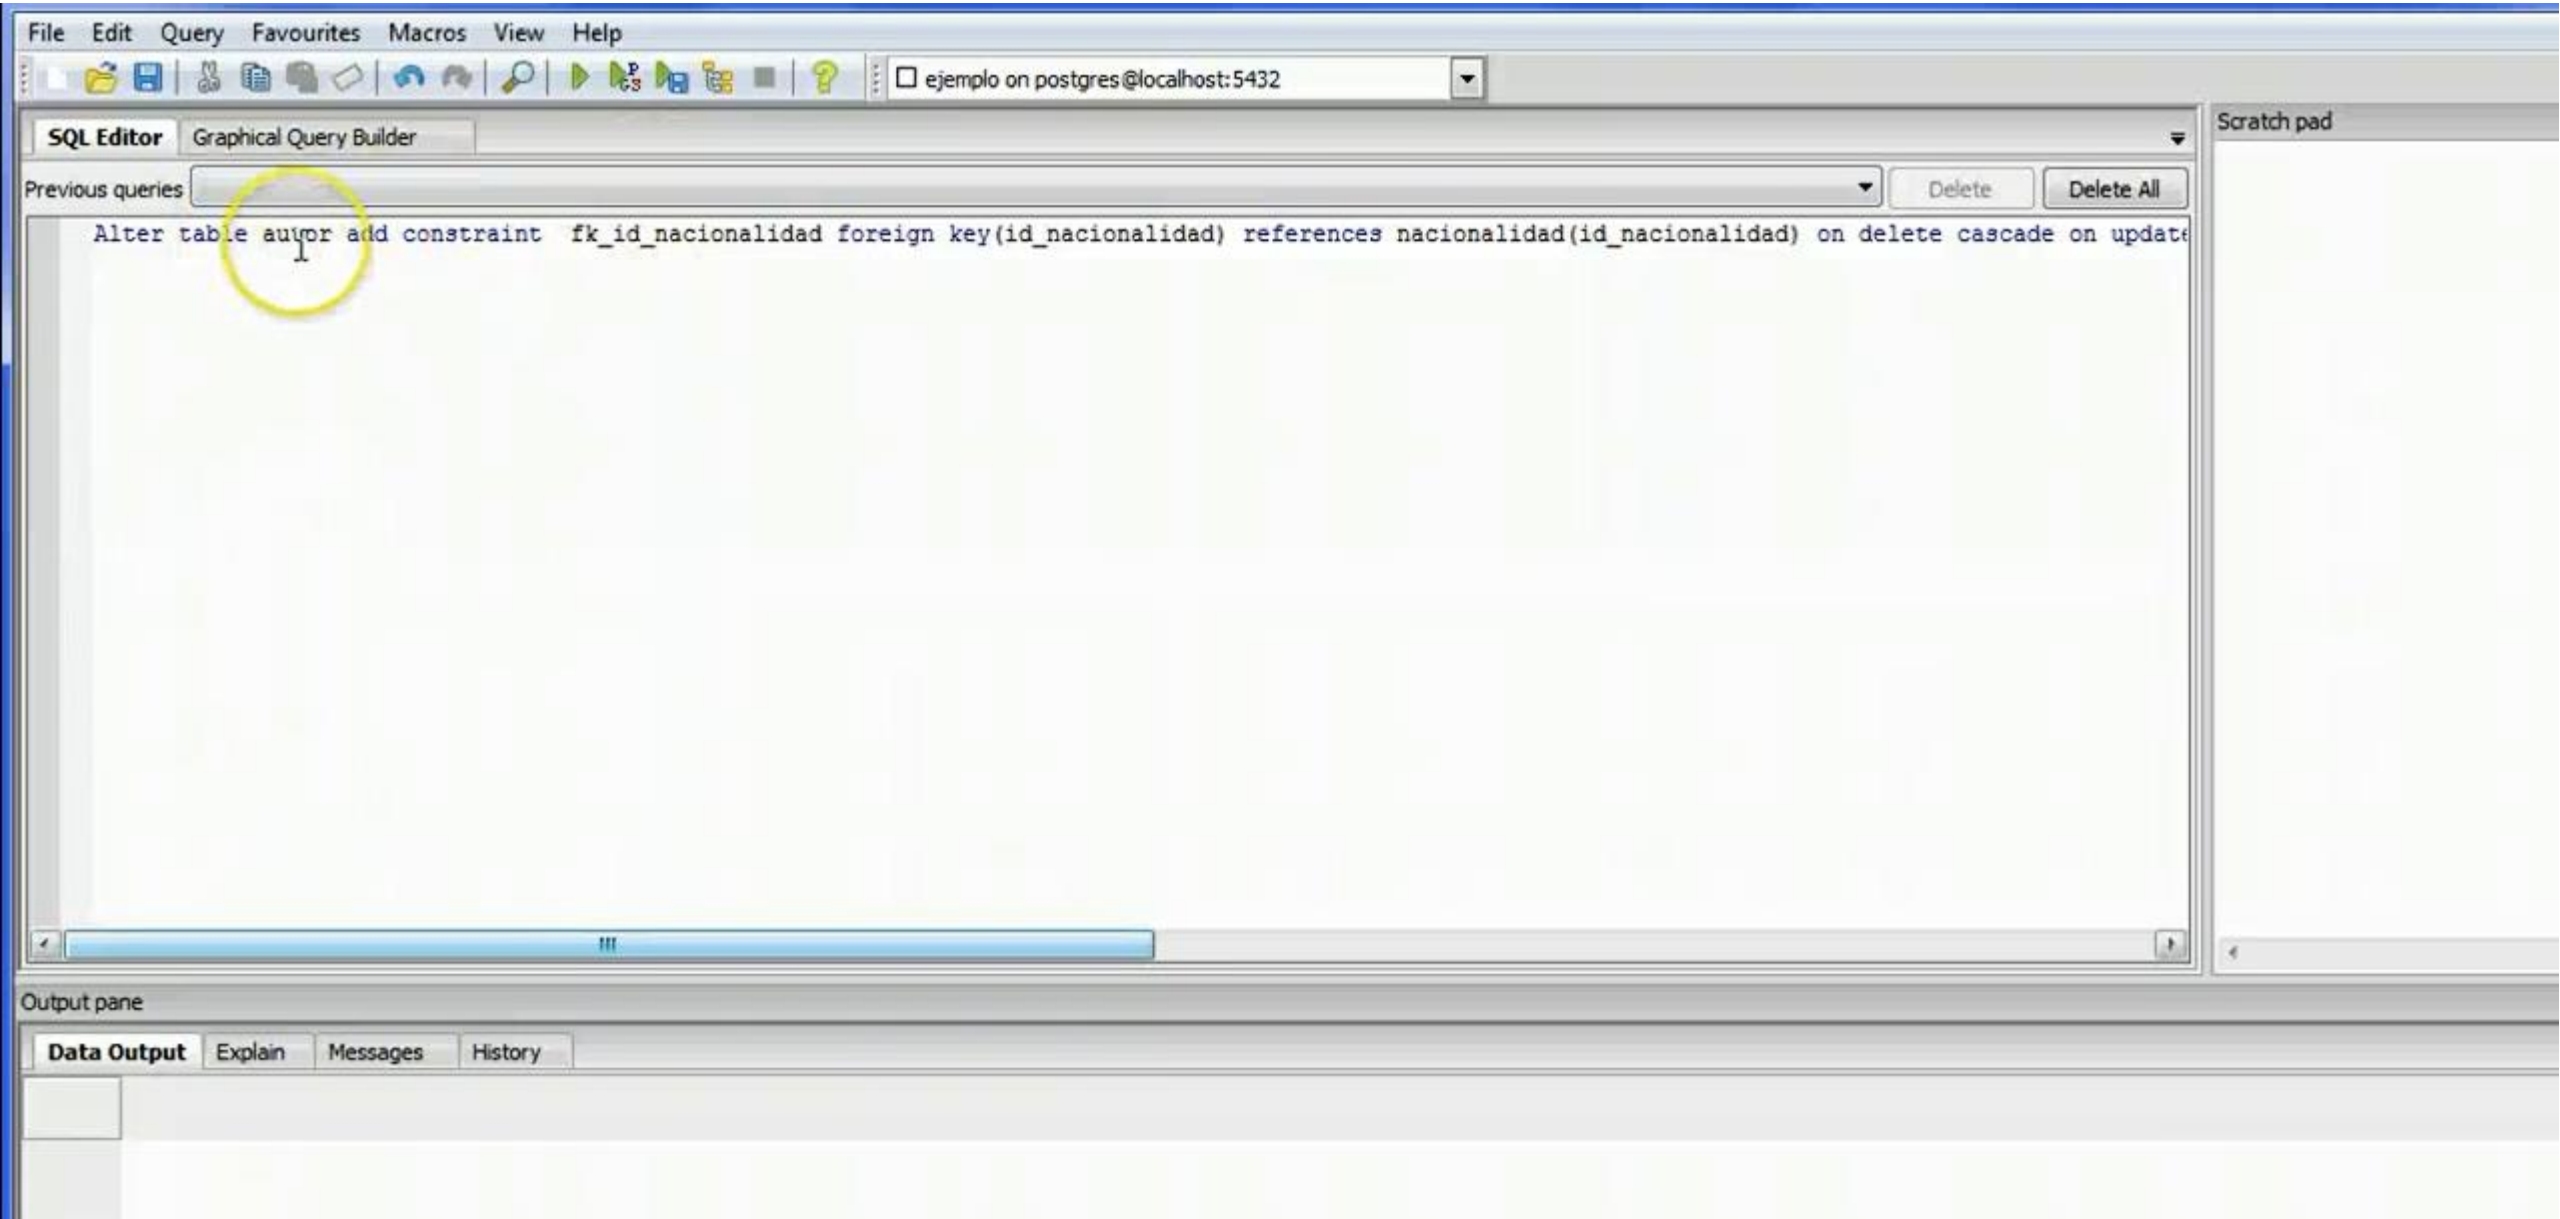
AHORA VAMOS A CREAR OTRA TABLA



UNA VES CREADA LA OTRA TABLA LA GUARDAMOS Y REFRESCAMOS Y NOS MOSTRARA 2 TABLAS



AHORA CREAREMOS LA RELACION , ENTRAMOS A SENTENCIA SQL PARA CREAR AL RELACION



ery - ejemplo on postgres@localhost:5432 *

Edit Query Favourites Macros View Help

ejemplo on postgres@localhost:5432

Editor Graphical Query Builder

us queries

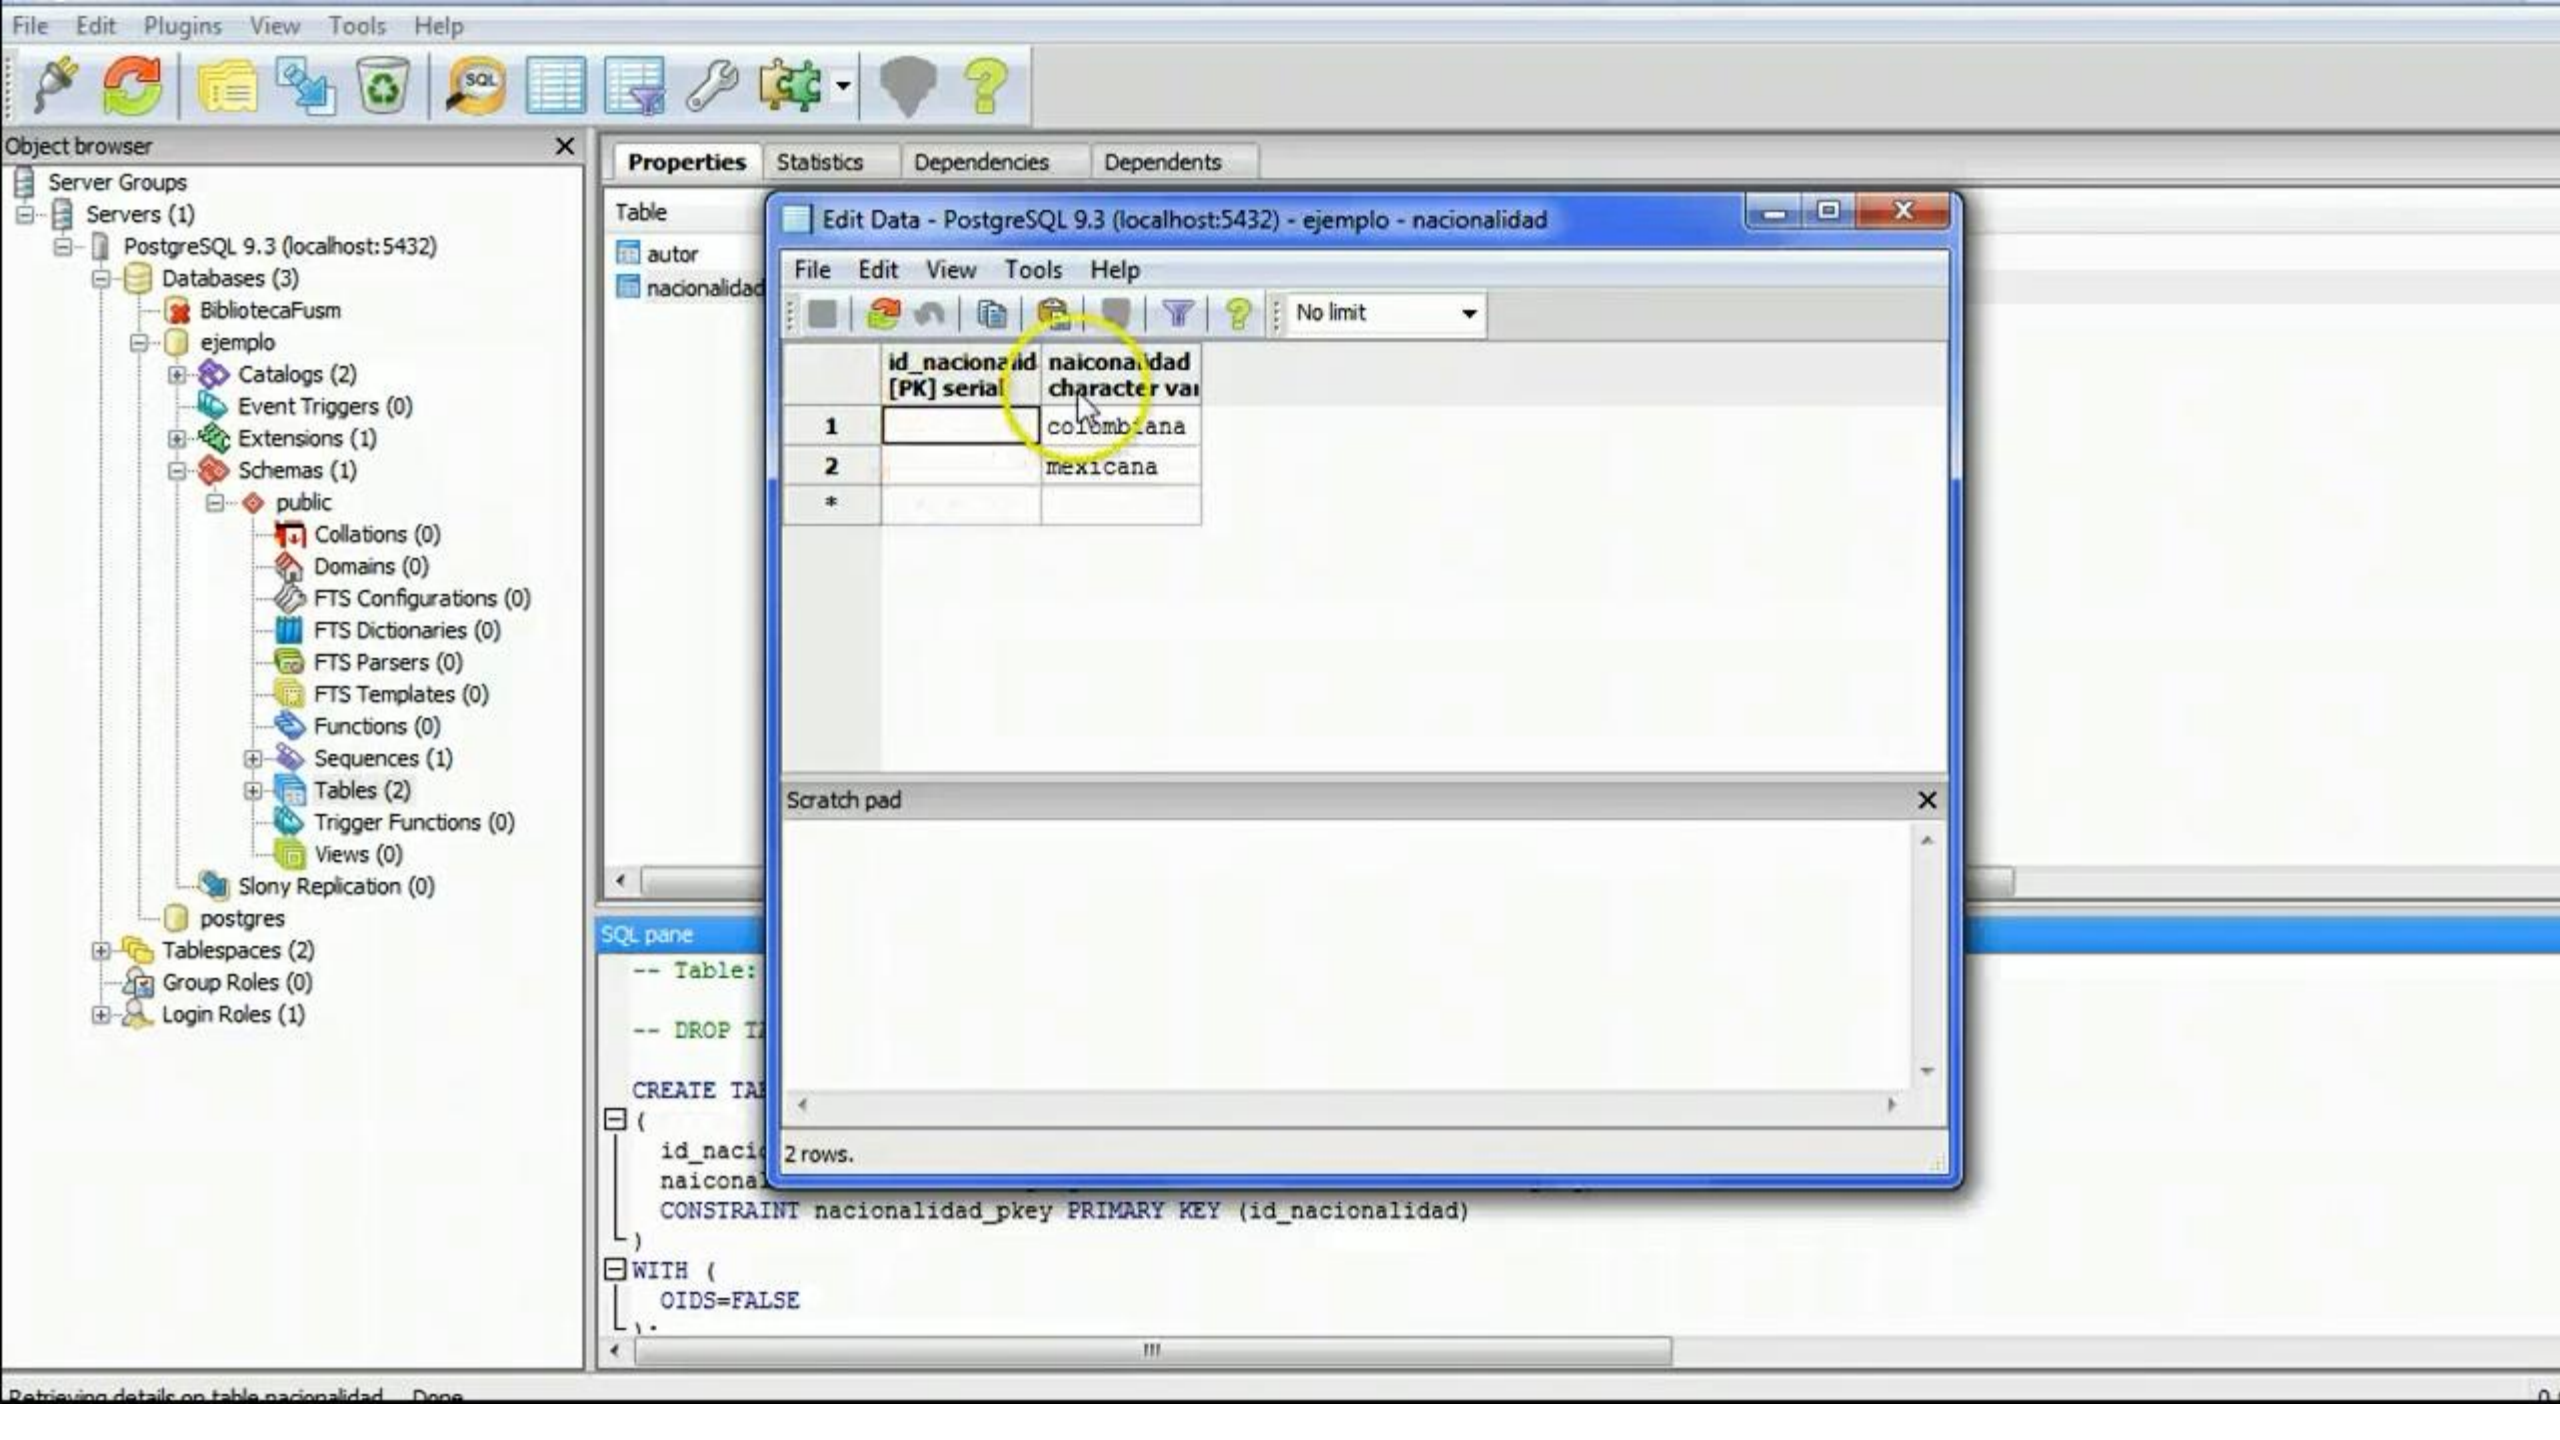
Delete Delete All

```
tor add constraint  fk_id_nacionalidad foreign key(id_nacionalidad) references nacionalidad(id_nacionalidad) on delete cascade on update cascade;
```

Scratch pad

t pane

a Output Explain Messages History


File Edit Plugins View Tools Help
Object browser
Server Groups
Servers (1)
PostgreSQL 9.3 (localhost:5432)
Databases (3)
BibliotecaFusm
ejemplo
Catalogs (2)
Event Triggers (0)
Extensions (1)
Schemas (1)
public
Collations (0)
Domains (0)
FTS Configurations (0)
FTS Dictionaries (0)
FTS Parsers (0)
FTS Templates (0)
Functions (0)
Sequences (1)
Tables (2)
Trigger Functions (0)
Views (0)
Slony Replication (0)
postgres
Tablespaces (2)
Group Roles (0)
Login Roles (1)
Properties
Statistics
Dependencies
Dependents
Table
autor
nacionalidad
Edit Data - PostgreSQL 9.3 (localhost:5432) - ejemplo - nacionalidad
File Edit View Tools Help
No limit
id_nacionalidad [PK] serial
naiconalidad character var
1
colombiana
2
mexicana
*
Scratch pad
2 rows.
SQL pane
-- Table:
-- DROP TI
CREATE TA
(
id_nacio
naiconal
CONSTRAINT nacionalidad_pkey PRIMARY KEY (id_nacionalidad)
)
WITH (
OIDS=FALSE
);
Retrieving details on table nacionalidad... Done